

## SOD-323 Plastic-Encapsulate Diodes


### DESCRIPTION

Unidirectional ElectroStatic Discharge (ESD) protection diode designed to protect one signal line from the damage caused by ESD and other transients.

Uni-direction ESD Protection Diode

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

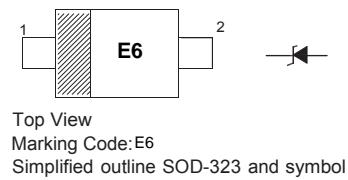

### FEATURES

- Uni-directional ESD protection
- Low reverse stand-off voltage: 5V
- Low reverse clamping voltage
- Low leakage current
- Fast response time
- JESD22-A114-B ESD Rating of class 3B per human body model
- IEC 61000-4-2 Level 4 ESD protection

### MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ unless otherwise noted )

Parameter	Symbol	Limit	Unit
IEC 61000-4-2 ESD Voltage	$V_{ESD}^{(1)}$	$\pm 25$	kV
Air Model		$\pm 25$	
Contact Model		$\pm 16$	
JESD22-A114-B ESD Voltage		$\pm 0.4$	
ESD Voltage	$P_{PP}^{(2)}$	210	W
Peak Pulse Power	$I_{PP}^{(2)}$	13	A
Peak Pulse Current	$T_L$	260	°C
Lead Solder Temperature – Maximum (10 Second Duration)	$T_j$	150	°C
Junction Temperature	$T_{stg}$	-55 ~ +150	°C
Storage Temperature Range			


(1).Device stressed with ten non-repetitive ESD pulses.

(2).Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5.

## PESD5V0S1BA

### ELECTRICAL PARAMETER

Symbol	Parameter
$V_C$	Clamping Voltage @ $I_{PP}$
$I_{PP}$	Peak Pulse Current
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{RWM}$	Reverse Standoff Voltage
$V_F$	Forward Voltage@ $I_F$
$I_F$	Forward Current

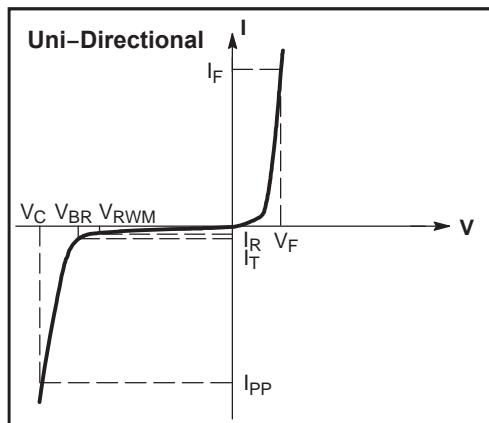


### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ unless otherwise noted )





Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse stand off voltage	$V_{RWM}^{(1)}$				5.0	V
Reverse leakage current	$I_R$	$V_{RWM}=5.0V$			1.0	$\mu A$
Breakdown voltage	$V_{(BR)}$	$I_T=1mA$	6.2		7.3	V
Clamping voltage	$V_C^{(2)}$	$I_{PP}=13A$			13	V
Junction capacitance	$C_J$	$V_R=0V, f=1MHz$		95		pF

(1).Other voltages available upon request.

(2).Non-repetitive current pulse 8/20 $\mu s$  exponential decay waveform according to IEC61000-4-5

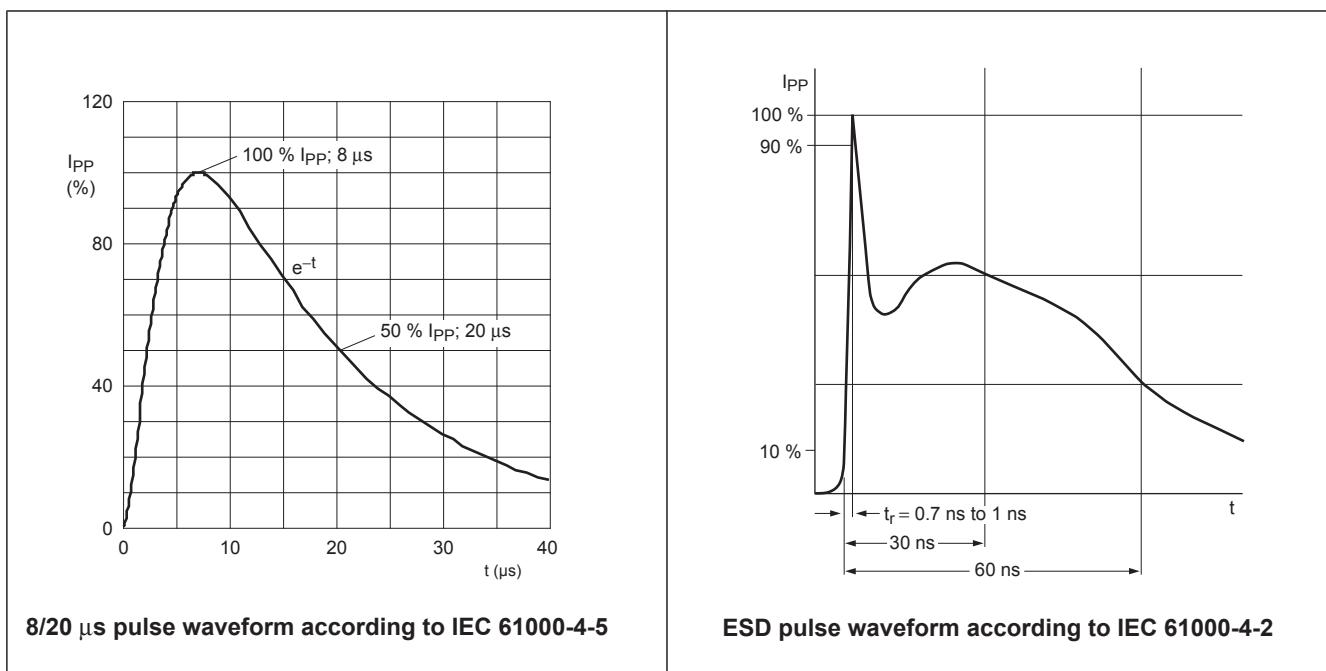

### TYPICAL CHARACTERISTICS

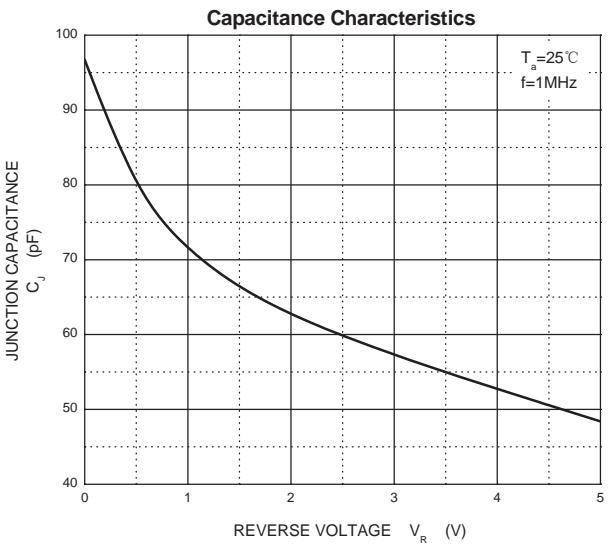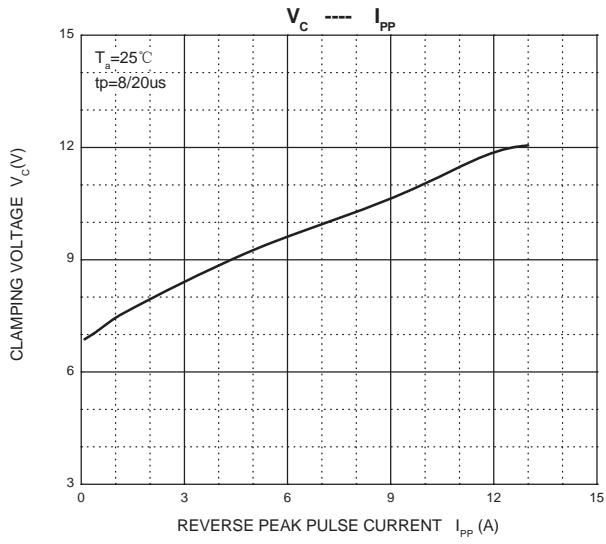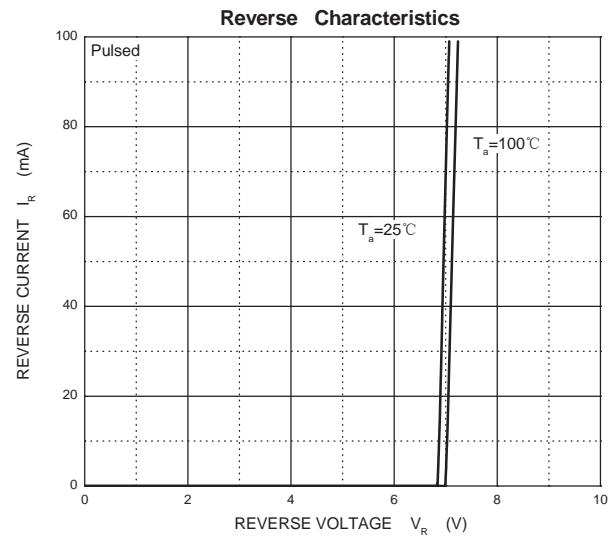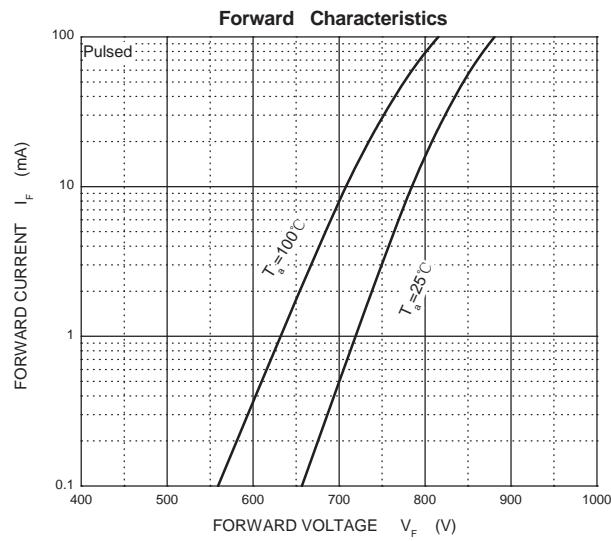

**PACKAGE OUTLINE**

Plastic surface mounted package; 2 leads

SOD-323

