

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	M28S
▶ Overseas	Part Number	M28S
▶ Equivalent	Part Number	M28S


EV is the abbreviation of name EVVO

■ NPN Transistors

■ Features

Power dissipation

$P_{cm}: 0.625W$ ($T_{amb}=25^{\circ}C$)

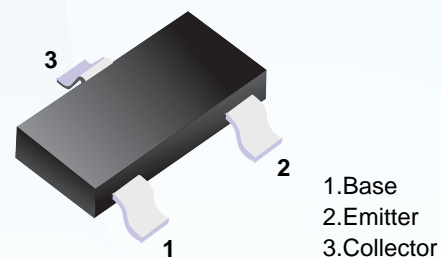

■ Simplified outline(SOT-23)

■ Marking

Marking	28S
---------	-----

■ MAXIMUM RATINGS ($T_A=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	Value	Units
VCBO	Collector-Base Voltage	40	V
VCEO	Collector-Emitter Voltage	20	V
VEBO	Emitter-Base Voltage	6	V
IC	Collector Current -Continuous	1	A
PC	Collector Power Dissipation	0.625	W
Tj	Junction Temperature	150	$^{\circ}C$
Tstg	Storage Temperature	-55-150	$^{\circ}C$


■ ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100\mu A, I_E = 0$	40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1mA, I_B = 0$	20			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 100\mu A, I_C = 0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB} = 30V, I_E = 0$			1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = 15V, I_B = 0$			10	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5V, I_C = 0$			1	μA
DC current gain	h_{FE}	$V_{CE} = 1V, I_C = 100mA$	300		1000	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 600mA, I_B = 20mA$			0.55	V
Transition frequency	f_T	$V_{CE} = 10V, I_C = 50mA$ $f = 30MHz$	100			MHz

■ CLASSIFICATION OF h_{FE}

Range	300-500	500-700	700-1000	
-------	---------	---------	----------	--

■ SOT-23

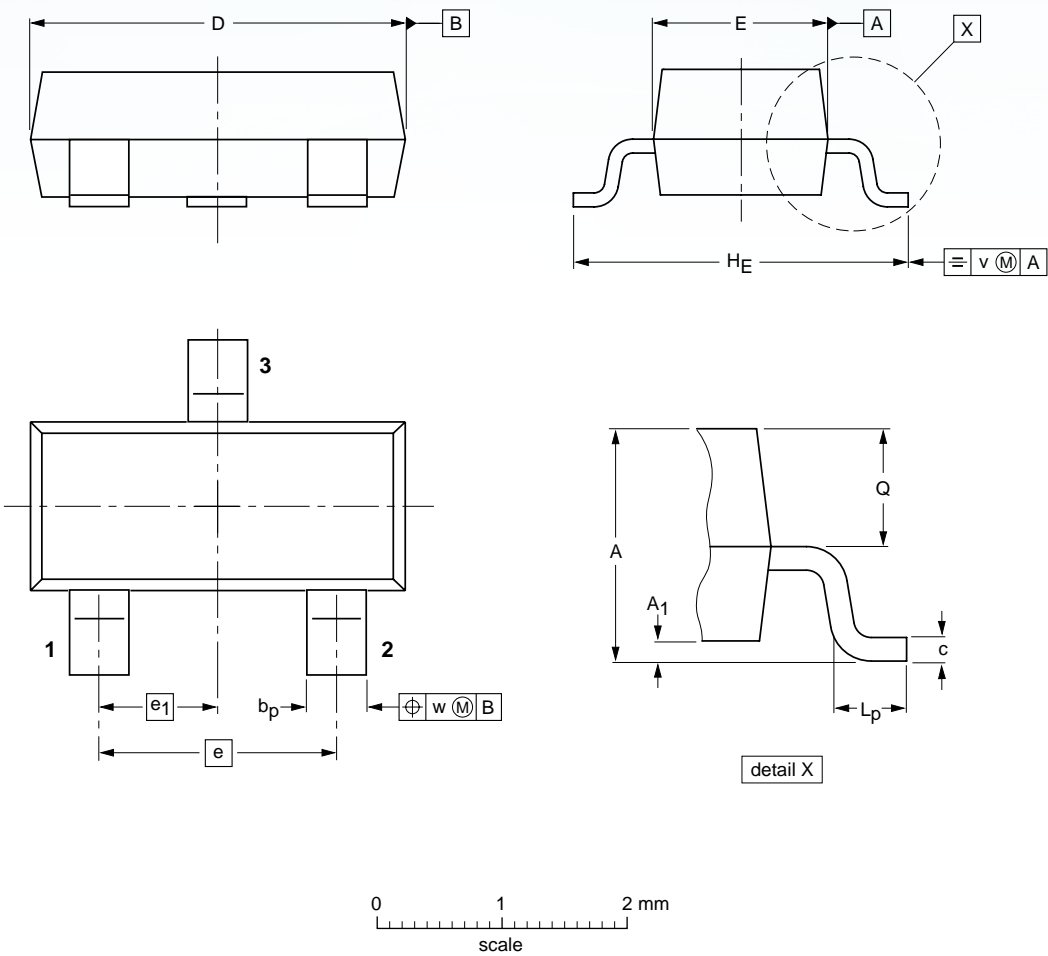

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max.	b _p	c	D	E	e	e ₁	H _E	L _p	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.