

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	SS32BF THRU SS320BF
▶ Overseas	Part Number	SS32BF THRU SS320BF
▶ Equivalent	Part Number	SS32BF THRU SS320BF

EV is the abbreviation of name EVVO

SS32BF THRU SS320BF

20V-200V 3.0A

FEATURES

- ◆ Metal silicon junction, majority carrier conduction
- ◆ For surface mounted applications
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ For use in low voltage, high frequency inverters, free-wheeling, and polarity protection applications


MECHANICAL DATA

Case: JEDEC SMBF molded plastic body

Terminals: leads solderable per MIL-STD-750, Method 2026

Mounting Position: Any

Weight: 57mg/0.002oz

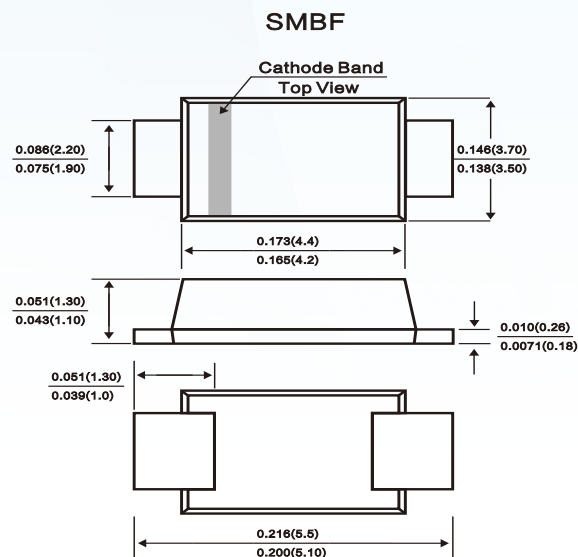

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	SS32BF	SS34BF	SS36BF	SS38BF	SS310BF	SS315BF	SS320BF	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	40	60	80	100	150	200	VOLTS
Maximum RMS voltage	V _{RMS}	14	28	42	56	70	105	140	VOLTS
Maximum DC blocking voltage	V _{DC}	20	40	60	80	100	150	200	VOLTS
Maximum average forward rectified current at T _L (see fig.1)	I _(AV)	3.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	80.0			70.0				Amps
Maximum instantaneous forward voltage at 3.0A	V _F	0.55		0.70	0.85		0.95		Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.5 5.0			0.3 3.0				mA
Typical junction capacitance (NOTE 1)	C _J	450			400				pF
Typical thermal resistance (NOTE 2)	R _{θJA}	50.0							°C/W
Operating junction temperature range	T _J	-50 to +125							°C
Storage temperature range	T _{STG}	-50 to +150							°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

20V-200V 3.0A

Fig.1 Forward Current Derating Curve

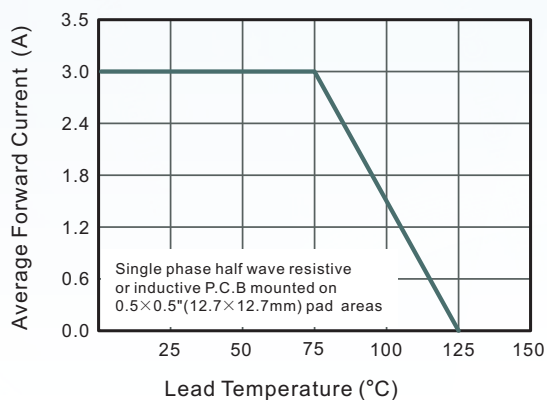


Fig.2 Typical Reverse Characteristics

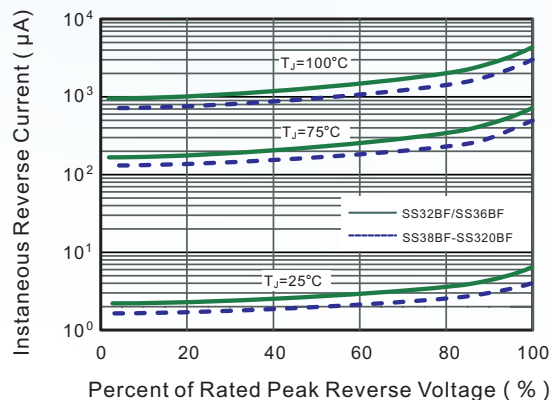


Fig.3 Typical Forward Characteristic

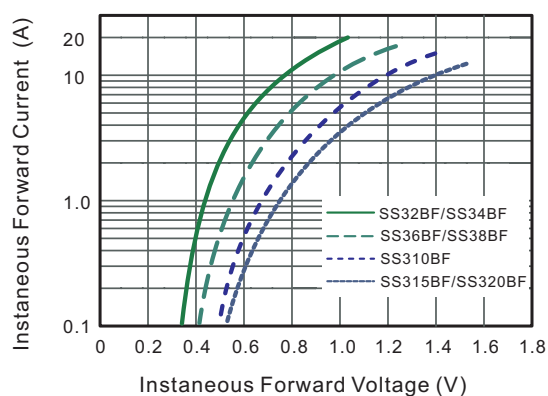


Fig.4 Typical Junction Capacitance

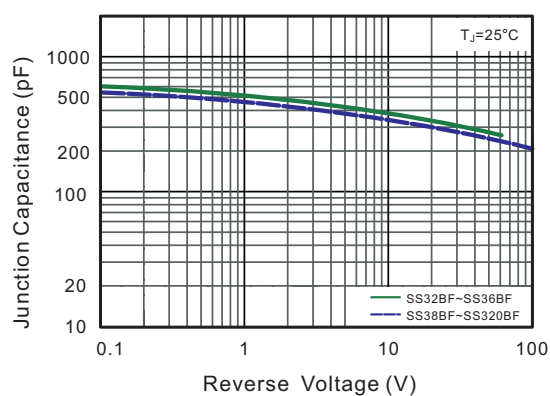


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


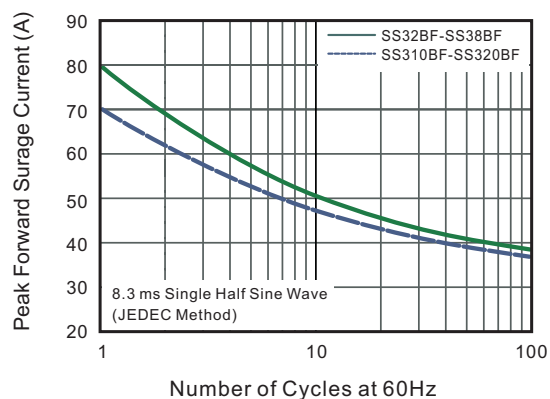


Fig.6- Typical Transient Thermal Impedance

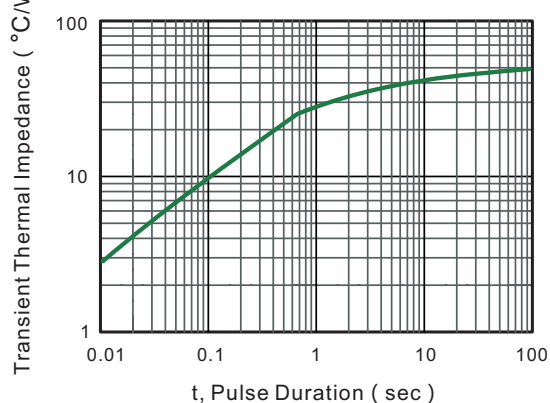

20V-200V 3.0A**ORDERING INFORMATION**

Order Code	Package	Baseqty	Deliverymode
SS32BF	SMBF	3000	Tape and reel
SS34BF	SMBF	3000	Tape and reel
SS36BF	SMBF	3000	Tape and reel
SS38BF	SMBF	3000	Tape and reel
SS310BF	SMBF	3000	Tape and reel
SS315BF	SMBF	3000	Tape and reel
SS320BF	SMBF	3000	Tape and reel

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.