

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification


▶ Domestic	Part Number	SI2318A
▶ Overseas	Part Number	SI2318A
▶ Equivalent	Part Number	SI2318A

EV is the abbreviation of name EVVO

SOT-23-3L Plastic-Encapsulate MOSFETS


■ Features

- $V_{DS} (V) = 40V$
- $I_D = 5.6 A$ ($V_{GS} = 10V$)
- $R_{DS(ON)} < 42m\Omega$ ($V_{GS} = 10V$)
- $R_{DS(ON)} < 51m\Omega$ ($V_{GS} = 4.5V$)
- Pb-Free Package May be Available. The G-Suffix Denotes a Pb-Free Lead Finish

SOT - 23


1. GATE
2. SOURCE
3. DRAIN

Equivalent Circuit



■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	40	V
Gate-Source Voltage		V_{GS}	± 20	
Continuous Drain Current	$T_c=25^\circ C$	I_D	5.6	A
	$T_c=70^\circ C$		4.5	
	$T_a=25^\circ C$		4.3	
	$T_a=70^\circ C$		3.5	
Pulsed Drain Current		I_{DM}	20	
Power Dissipation	$T_c=25^\circ C$	P_D	2.1	W
	$T_c=70^\circ C$		1.3	
	$T_a=25^\circ C$		1.25	
	$T_a=70^\circ C$		0.8	
Thermal Resistance.Junction- to-Ambient		R_{thJA}	100	$^\circ C/W$
Thermal Resistance.Junction- to-Foot		R_{thJF}	60	
Junction Temperature		T_J	150	$^\circ C$
Storage Temperature Range		T_{stg}	-55 to 150	







SOT-23-3L Plastic-Encapsulate MOSFETS

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V _{DSS}	I _D =250 μA, V _{GS} =0V	40			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =40V, V _{GS} =0V			1	μA
		V _{DS} =40V, V _{GS} =0V, T _J =70°C			10	
Gate-Body Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±20V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1.2		2.5	V
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} =10V, I _D =4.3A			42	mΩ
		V _{GS} =4.5V, I _D =3.9A			51	
On State Drain Current	I _{D(ON)}	V _{DS} ≥5V, V _{GS} =10V	20			A
Forward Transconductance	g _{FS}	V _{DS} =20V, I _D =4.3A		17		S
Input Capacitance	C _{iss}	V _{GS} =0V, V _{DS} =20V, f=1MHz		340		pF
Output Capacitance	C _{oss}			60		
Reverse Transfer Capacitance	C _{rss}			30		
Gate Resistance	R _g	V _{GS} =0V, V _{DS} =0V, f=1MHz	0.6		6.6	Ω
Total Gate Charge	Q _g	V _{GS} =20V, V _{DS} =10V, I _D =4.3A		5.8	9	nC
		V _{GS} =20V, V _{DS} =4.5V, I _D =4.3A		2.9	6	
Gate Source Charge	Q _{gs}			1.1		
Gate Drain Charge	Q _{gd}			0.9		
Turn-On DelayTime	t _{d(on)}	V _{DD} = 20V, R _L = 5.7Ω I _D =3.5A, V _{GEN} = 4.5V, R _G = 1Ω		12	20	ns
Turn-On Rise Time	t _r			50	75	
Turn-Off DelayTime	t _{d(off)}			10	20	
Turn-Off Fall Time	t _f			8	16	
Turn-On DelayTime	t _{d(on)}	V _{DD} = 20V, R _L = 5.7Ω I _D =3.5A, V _{GEN} = 10V, R _G = 1Ω		7	14	ns
Turn-On Rise Time	t _r			20	30	
Turn-Off DelayTime	t _{d(off)}			14	21	
Turn-Off Fall Time	t _f			8	16	
Body Diode Reverse Recovery Time	t _{rr}	I _F =3.5A, dI/dt=100A/μs, T _J =25°C		15	23	nC
Body Diode Reverse Recovery Charge	Q _{rr}			7	14	
Reverse Recovery Fall Time	t _a			11		ns
Reverse Recovery Rise Time	t _b			4		
Maximum Body-Diode Continuous Current	I _S	T _C =25°C			1.75	A
Pulse Diode Forward Current	I _{SM}				20	
Diode Forward Voltage	V _{SD}	I _S =3.5A, V _{GS} =0V			1.2	V







SOT-23-3L Plastic-Encapsulate MOSFETS

Typical Characteristics

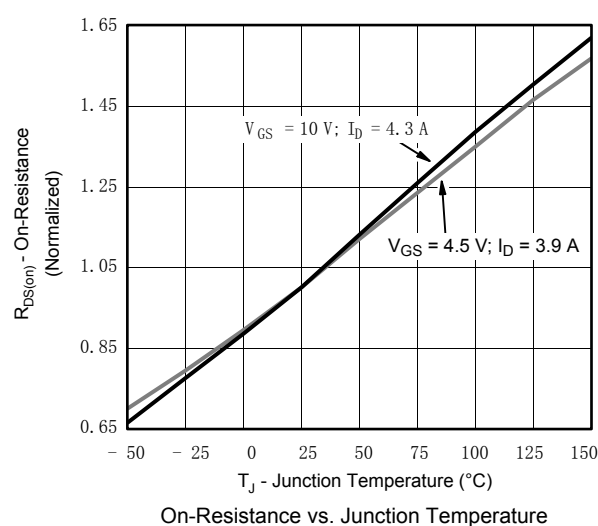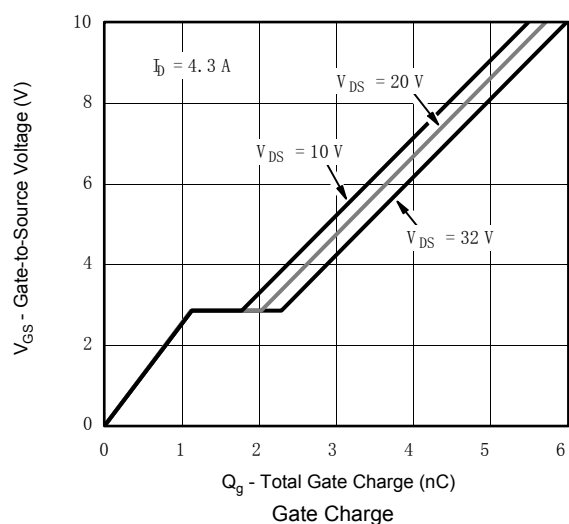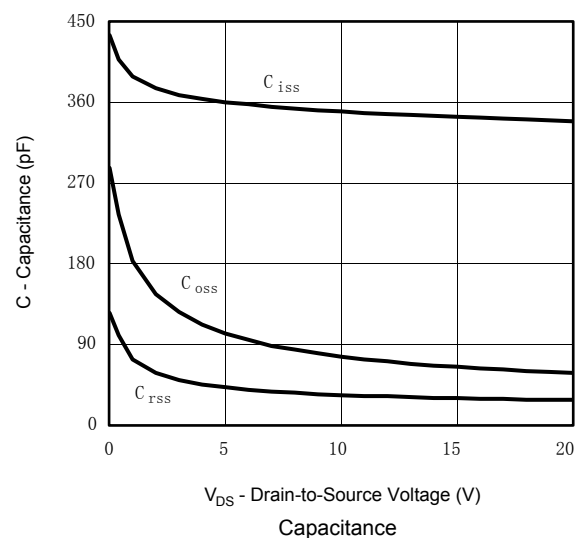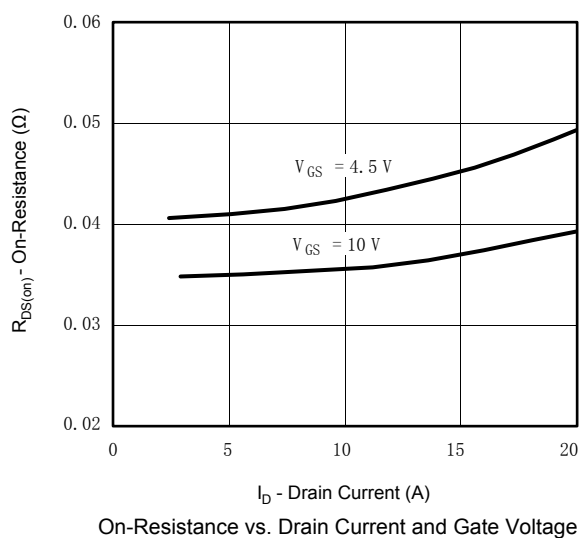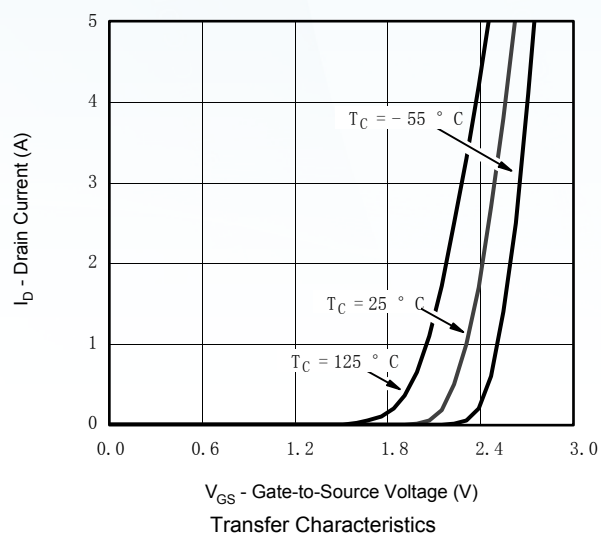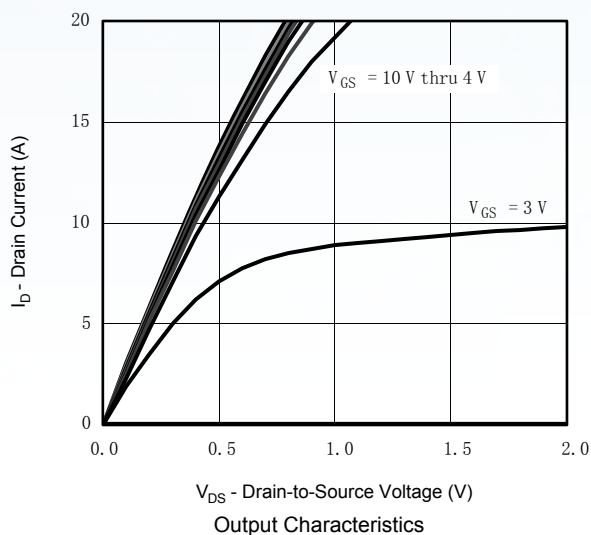


SOT-23-3L Plastic-Encapsulate MOSFETS

Typical Characteristics

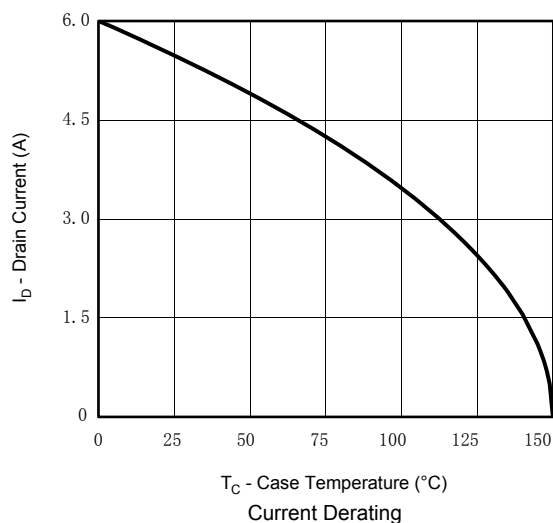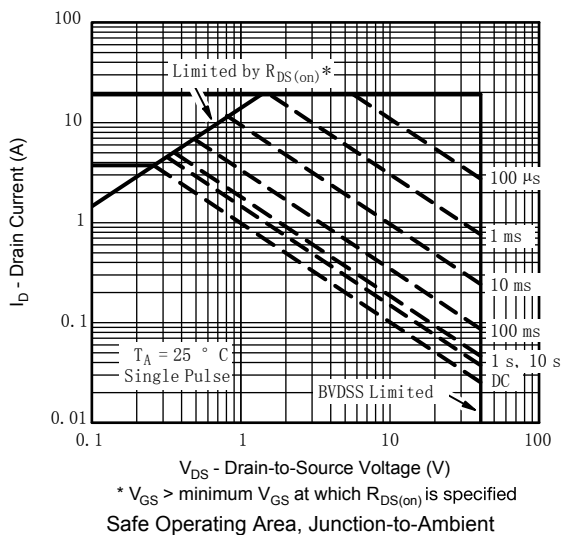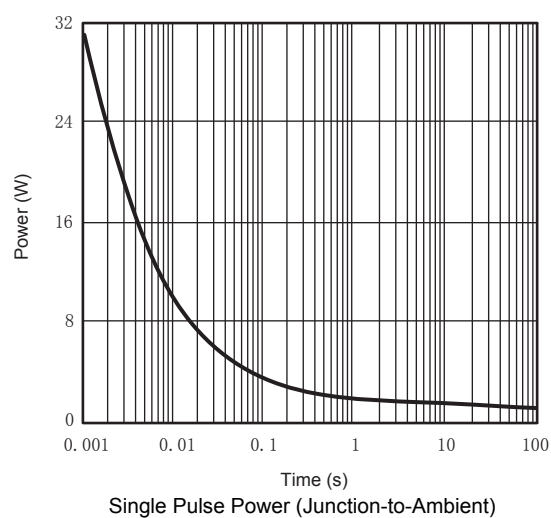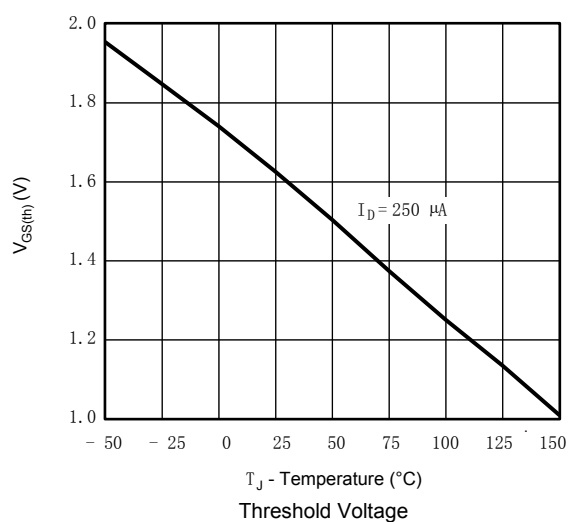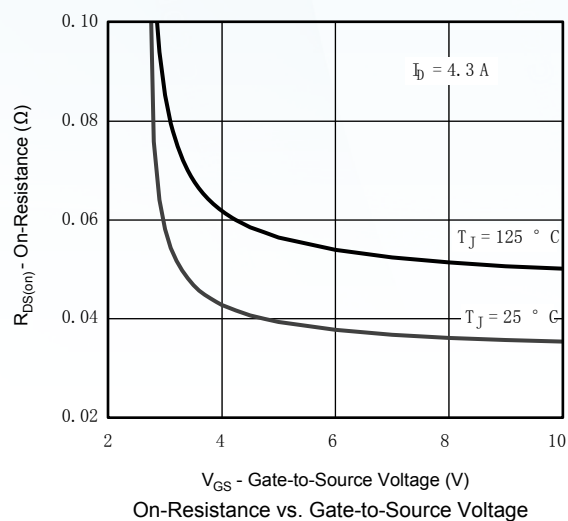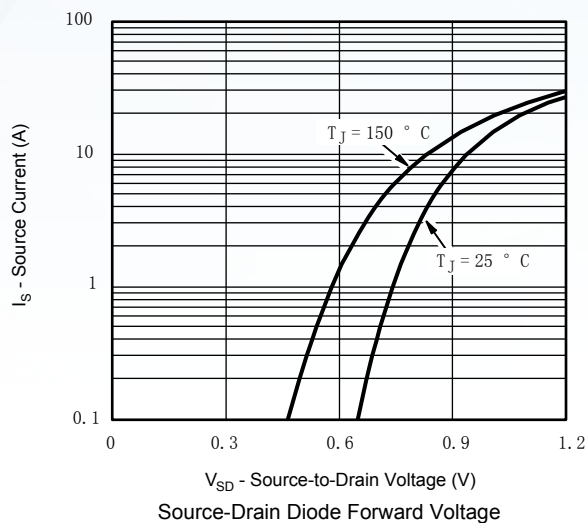


SOT-23-3L Plastic-Encapsulate MOSFETS


Typical Characteristics

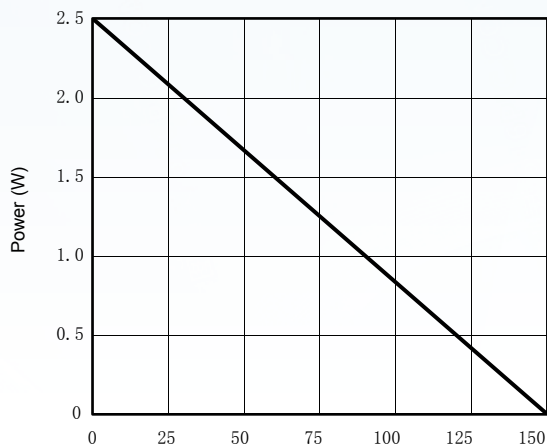


Power Derating, Junction-to-Foot

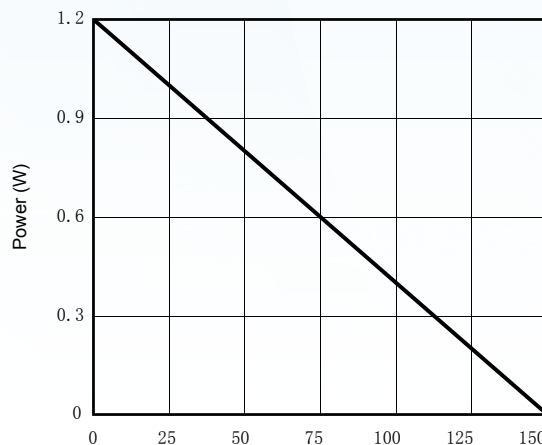

Power Derating, Junction-to-Ambient

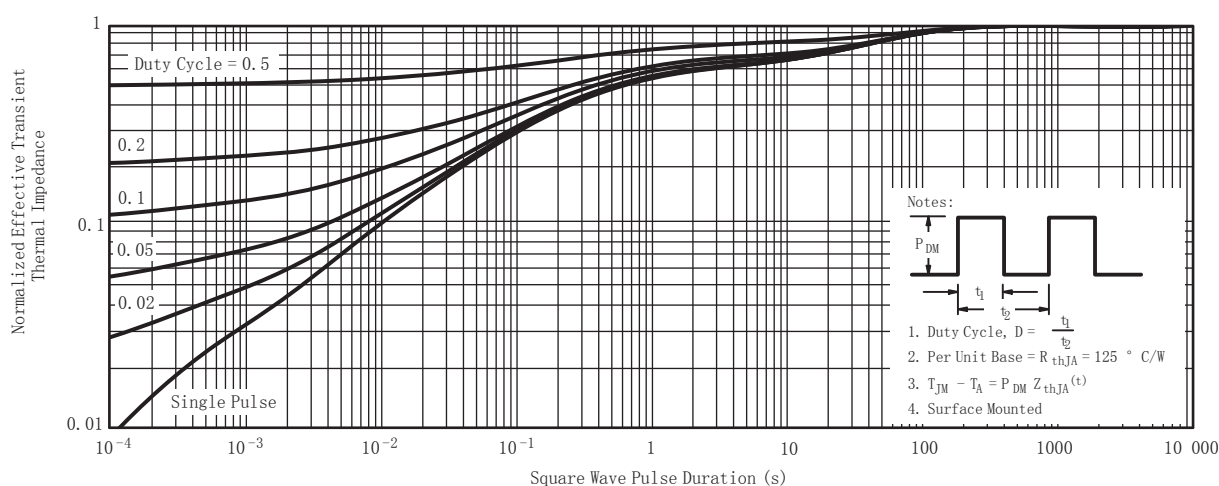


Normalized Thermal Transient Impedance, Junction-to-Ambient

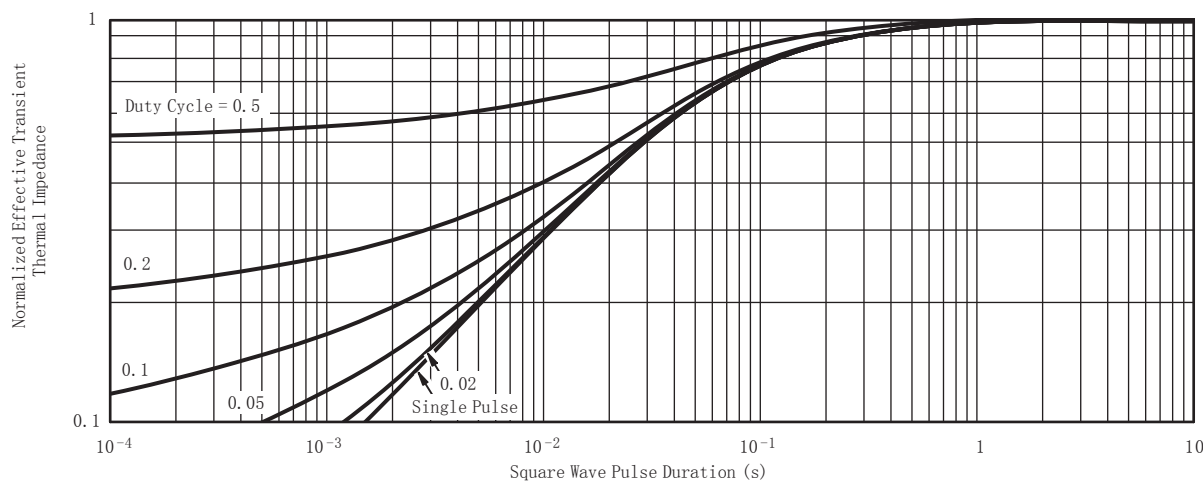

Normalized Thermal Transient Impedance, Junction-to-Foot


SOT-23-3L Plastic-Encapsulate MOSFETS

SOT-23 PACKAGE OUTLINE DIMENSIONS

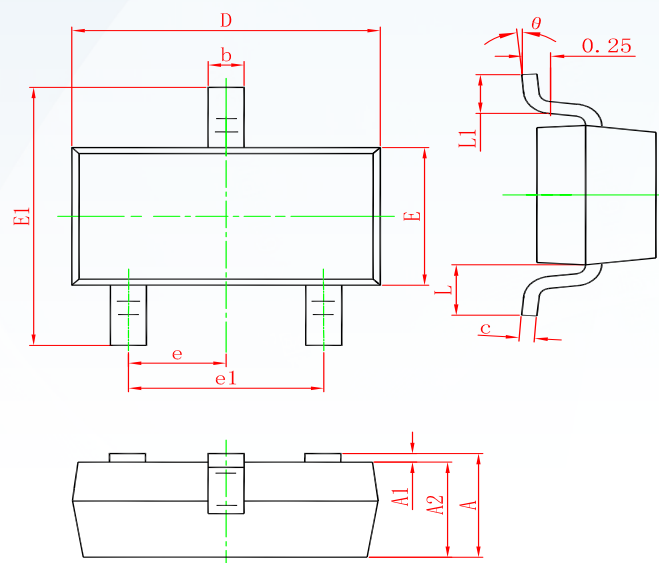

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
theta	0°	8°	0°	8°

Marking



Ordering information

Order code	Package	Baseqty	Deliverymode
SI2318A	SOT-23	3000	Tape and reel

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.