

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification


▶ Domestic	Part Number	IRLML5203
▶ Overseas	Part Number	IRLML5203
▶ Equivalent	Part Number	IRLML5203

EV is the abbreviation of name EVVO

SOT-23 Plastic-Encapsulate MOSFETS

IRLML5203 P-Channel 30-V(D-S) MOSFET


$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
-30V	85mΩ@-10 V	-3.0A
	145mΩ@-4.5V	

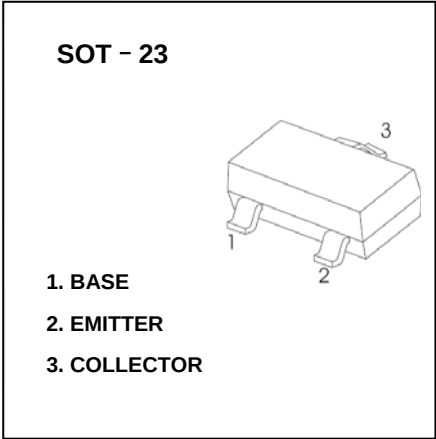


General Description

The IRLML5203 uses advanced trench technology to provide excellent $R_{DS(on)}$ with low gate charge. This device is suitable for use as a load switch or in PWM applications.

MARKING



Equivalent Circuit



Maximum ratings ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Units
Drain-Source voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	-3.0	A
Drain Current-Pulsed	I_{DM}	-24	A
Power Dissipation	P_D	300	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	417	$^{\circ}\text{C}/\text{W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~ +150	$^{\circ}\text{C}$

SOT-23 Plastic-Encapsulate MOSFETS

T_a=25 °C unless otherwise specified

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static characteristics						
Drain-source breakdown voltage	V _{(BR) DSS}	V _{GS} = 0V, I _D =-250μA	-30			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =-24V,V _{GS} = 0V			-1	μA
Gate -source leakage current	I _{GSS}	V _{GS} =±20V, V _{DS} = 0V			±100	nA
Drain-source on-resistance (note 1)	R _{DS(on)}	V _{GS} =-10V, I _D =-4.1A			85	mΩ
		V _{GS} =-4.5V, I _D =-3A			145	mΩ
Forward tranconductance (note 1)	g _{FS}	V _{DS} =-5V, I _D =-4A	5.5			S
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-1		-3	V
Diode forward voltage (note 1)	V _{SD}	I _S =-1A,V _{GS} =0V			-1	V
Dynamic characteristics (note 2)						
Input capacitance	C _{iss}	V _{DS} =-15V,V _{GS} =0V,f =1MHz		700		pF
Output capacitance	C _{oss}			120		pF
Reverse transfer capacitance	C _{rss}			75		pF
Switching characteristics (note 2)						
Turn-on delay time	t _{d(on)}	V _{GS} =-10V,V _{DS} =-15V, R _L =3.6Ω,R _{GEN} =3Ω		8.6		ns
Turn-on rise time	t _r			5.0		ns
Turn-off delay time	t _{d(off)}			28.2		ns
Turn-off fall time	t _f			13.5		ns

Notes:

1. Pulse test: Pulse width ≤300μs, Duty cycle ≤2%.
2. These parameter have no way to verify.

SOT-23 Plastic-Encapsulate MOSFETS

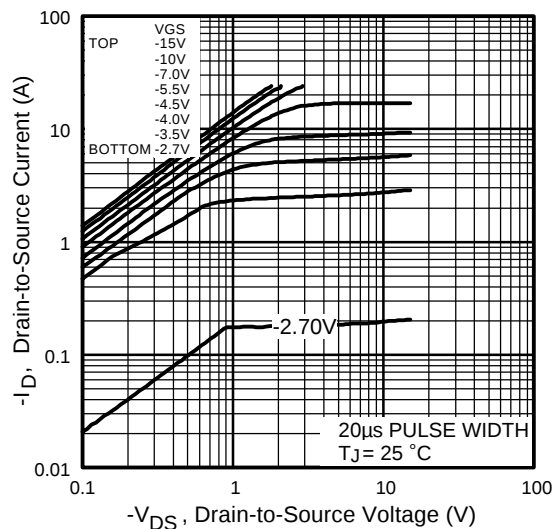


Fig 1. Typical Output Characteristics

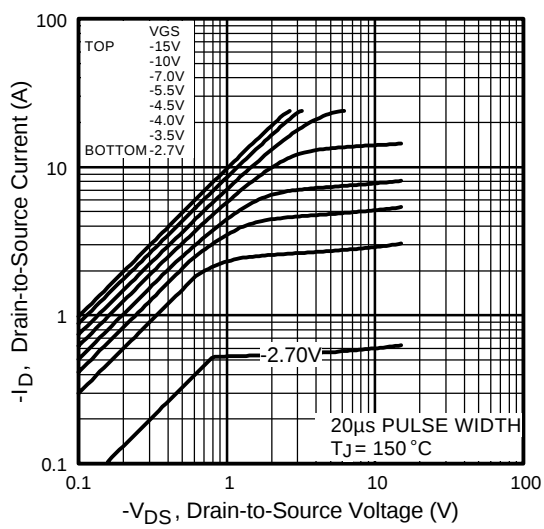


Fig 2. Typical Output Characteristics

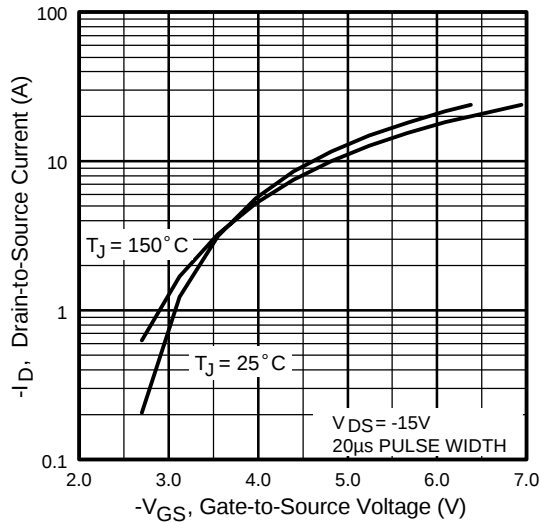


Fig 3. Typical Transfer Characteristics

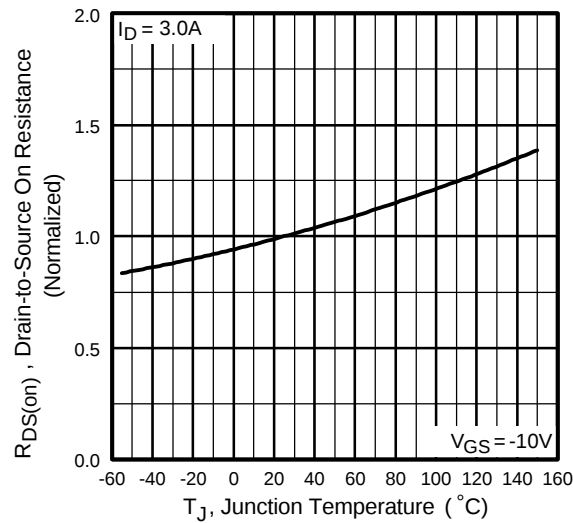


Fig 4. Normalized On-Resistance Vs. Temperature

SOT-23 Plastic-Encapsulate MOSFETS

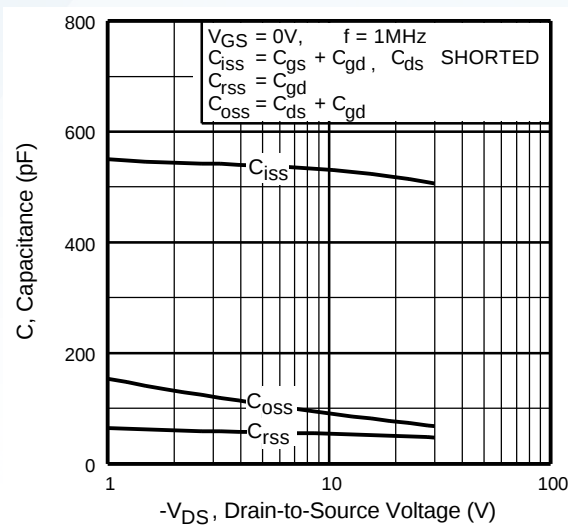


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

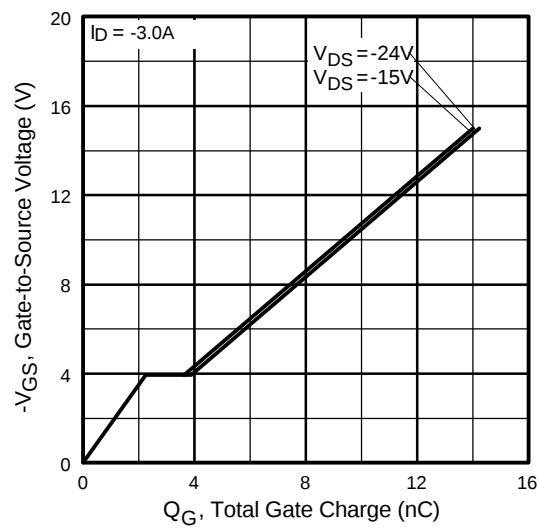


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

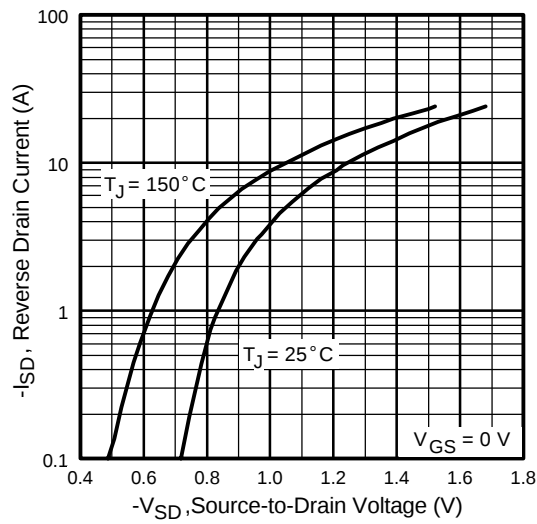


Fig 7. Typical Source-Drain Diode Forward Voltage

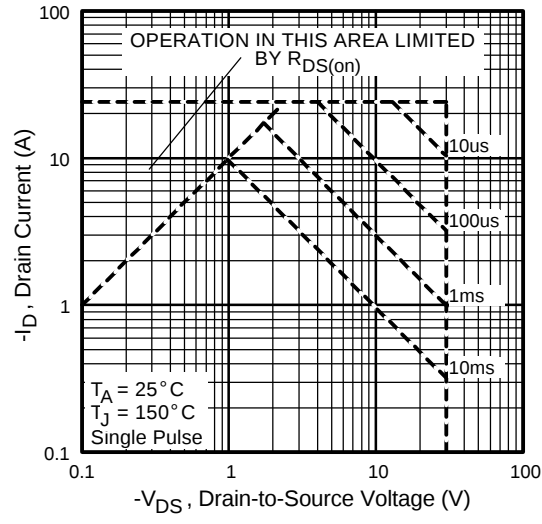


Fig 8. Maximum Safe Operating Area

SOT-23 Plastic-Encapsulate MOSFETS

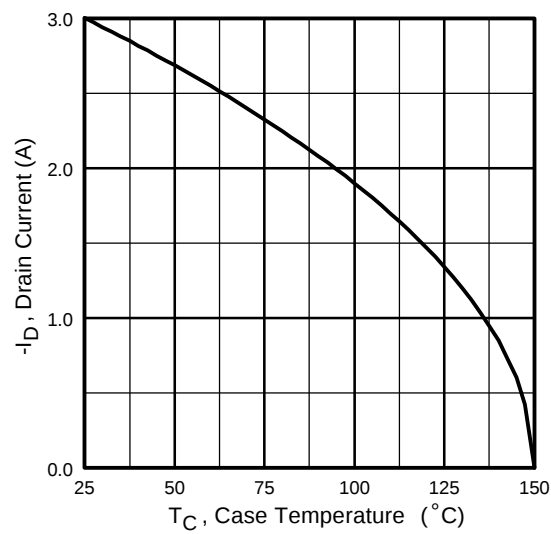


Fig 9. Maximum Drain Current Vs. Case Temperature

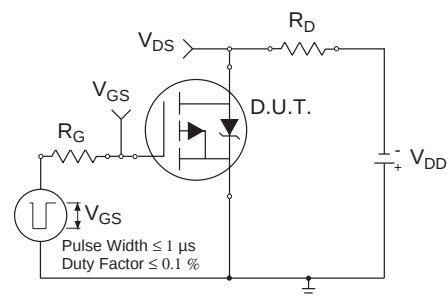


Fig 10a. Switching Time Test Circuit

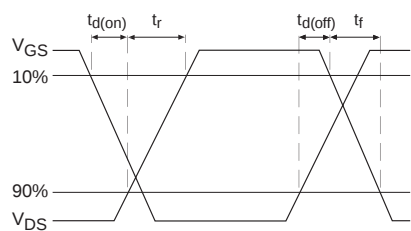


Fig 10b. Switching Time Waveforms

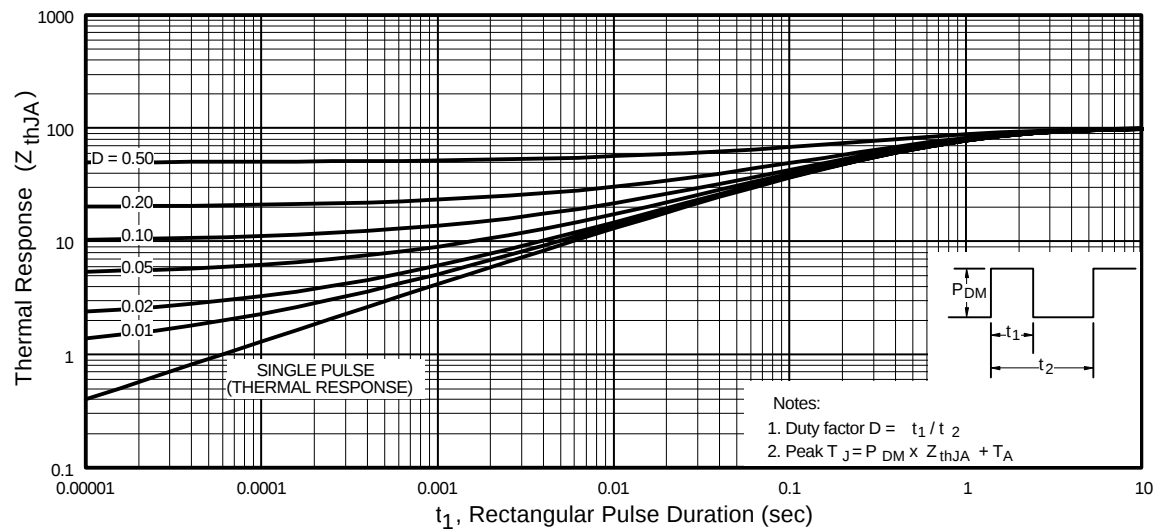


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

SOT-23 Plastic-Encapsulate MOSFETS

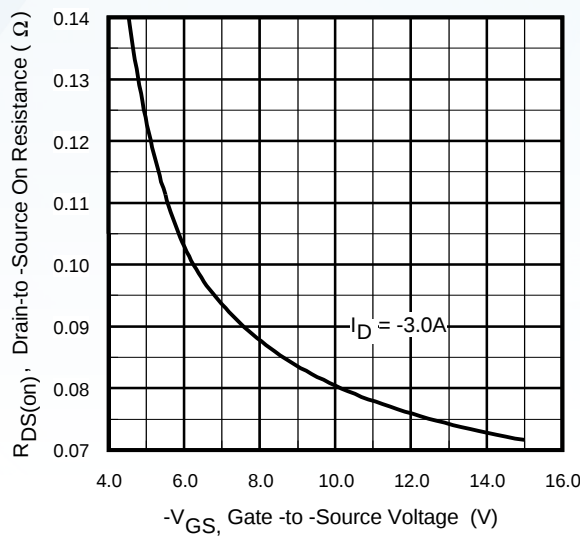


Fig 11. Typical On-Resistance Vs. Gate Voltage

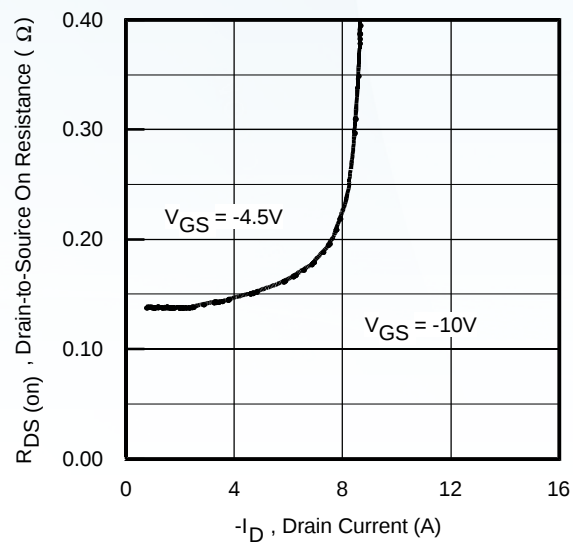


Fig 12. Typical On-Resistance Vs. Drain Current

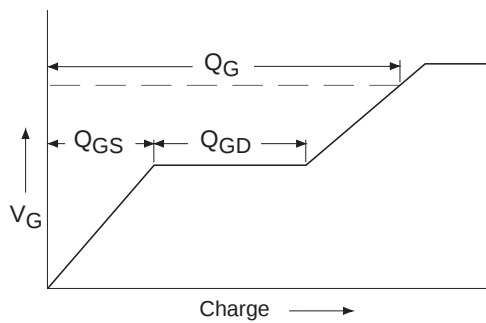


Fig 13a. Basic Gate Charge Waveform

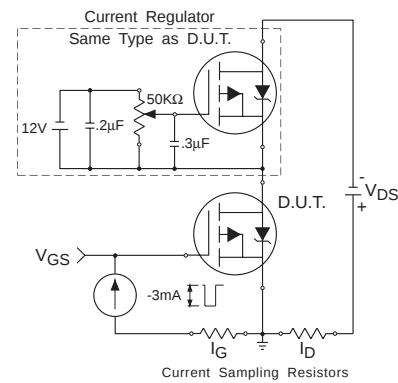


Fig 13b. Gate Charge Test Circuit

SOT-23 Plastic-Encapsulate MOSFETS

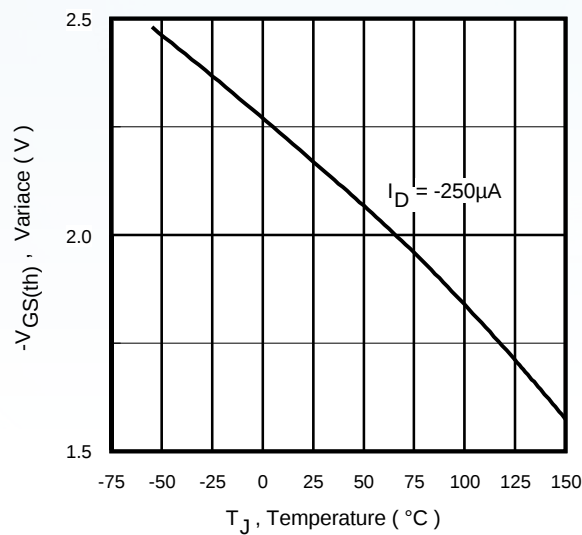


Fig 14. Threshold Voltage Vs. Temperature


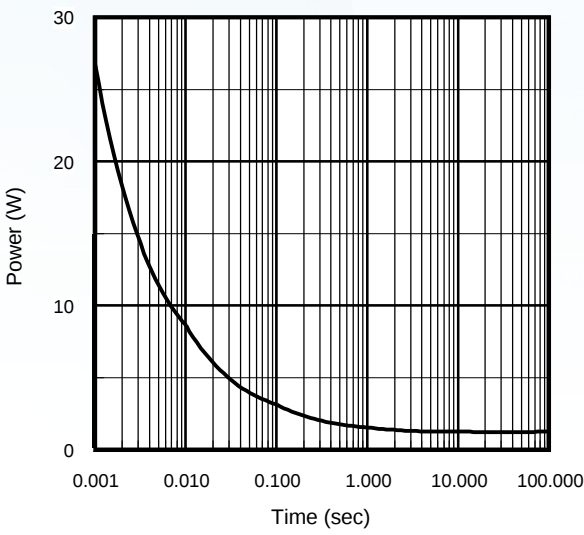


Fig 15. Typical Power Vs. Time

SOT-23 Plastic-Encapsulate MOSFETS

SOT-23 PACKAGE OUTLINE DIMENSIONS

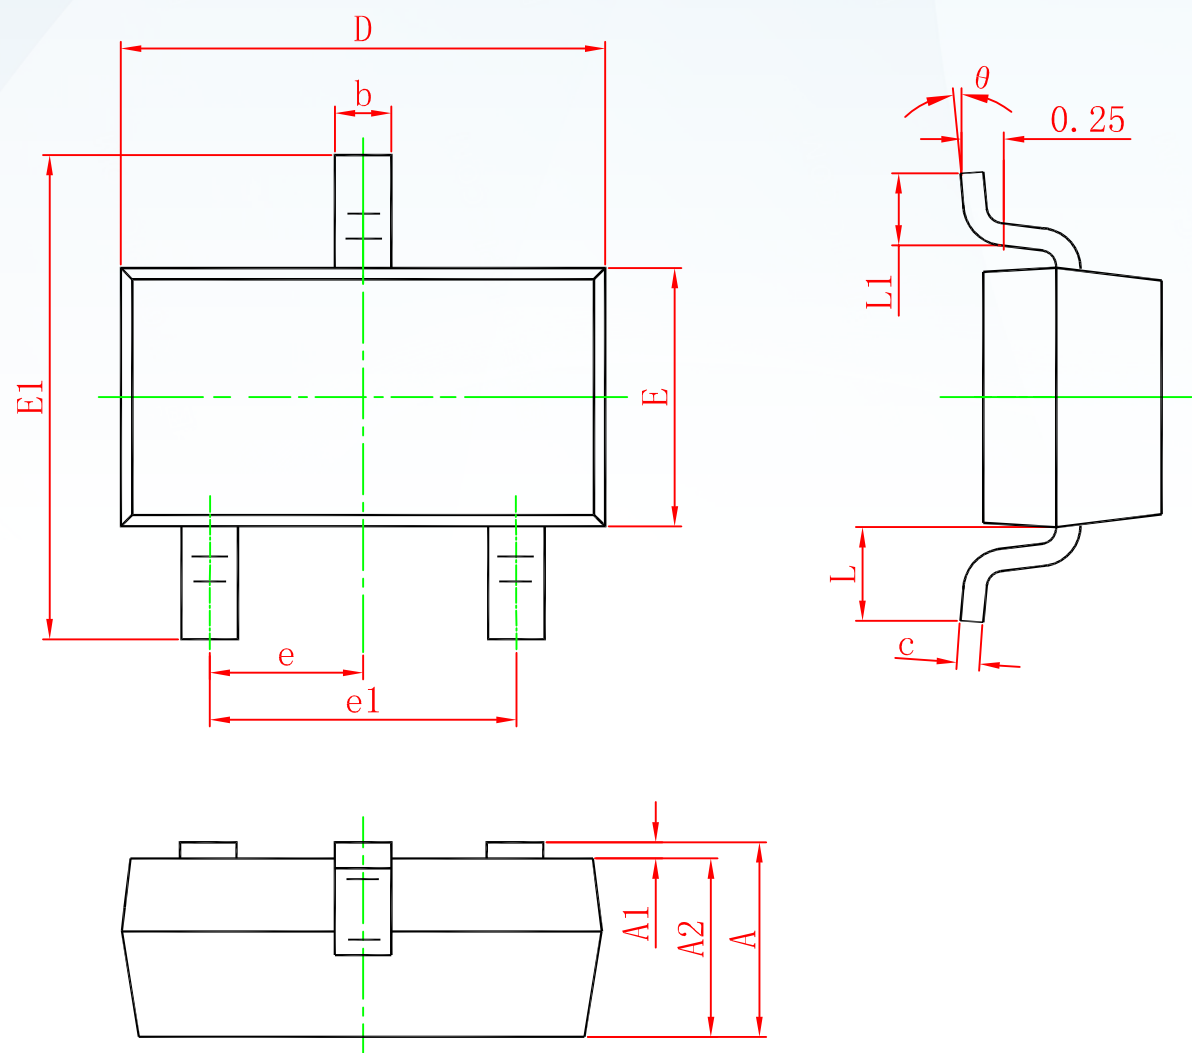

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.