

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	EV2SC4081-X-SM
▶ Overseas	Part Number	2SC4081-X
▶ Equivalent	Part Number	2SC4081-X


"SM" means SOT-323

EV is the abbreviation of name EVVO

■ NPN Transistor

■ Features

- Low Cob. Cob=2.0pF (Typ.)
- Complementary to 2SA1576A



1.Base
2.Emitter
3.Collector

■ Simplified outline(SOT-323)

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V _{CBO}	60	V
Collector - Emitter Voltage	V _{CEO}	50	
Emitter - Base Voltage	V _{EBO}	7	
Collector Current - Continuous	I _C	150	mA
Collector Power Dissipation	P _C	200	mW
Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{stg}	-55 to 150	

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V _{CBO}	I _C = 100 μ A, I _E = 0	60			V
Collector- emitter breakdown voltage	V _{CEO}	I _C = 1 mA, I _B = 0	50			
Emitter - base breakdown voltage	V _{EBO}	I _E = 100 μ A, I _C = 0	7			
Collector-base cut-off current	I _{CBO}	V _{CB} = 60V, I _E = 0			0.1	μ A
Emitter cut-off current	I _{EBO}	V _{EB} = 7V, I _C =0			0.1	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =50 mA, I _B =5mA			0.4	V
Base - emitter saturation voltage	V _{BE(sat)}	I _C =50 mA, I _B =5mA			1.2	
DC current gain	h _{FE}	V _{CE} = 6V, I _C = 1mA	120		560	
Collector output capacitance	C _{ob}	V _{CE} = 12V, I _E =0,f=1MHz		2	3.5	pF
Transition frequency	f _T	V _{CE} = 12V, I _E =-2mA,f=100MHz		180		MHz

■ Classification of h_{FE}

Type	EV2SC4081-Q-SM	EV2SC4081-R-SM	EV2SC4081-S-SM
Range	120-270	180-390	270-560
Marking	BQ	BR	BS

■ Typical Characteristics

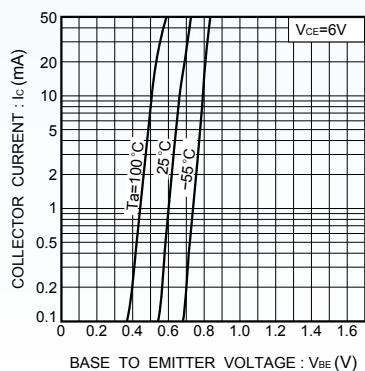


Fig.1 Grounded emitter propagation characteristics

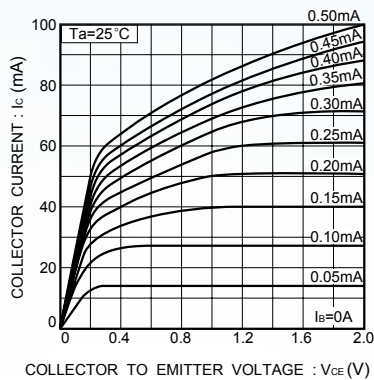


Fig.2 Grounded emitter output characteristics (I)

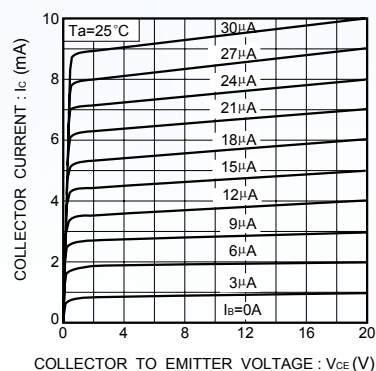


Fig.3 Grounded emitter output characteristics (I)I

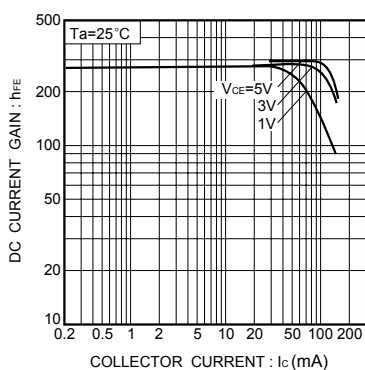


Fig.4 DC current gain vs. collector current (I)

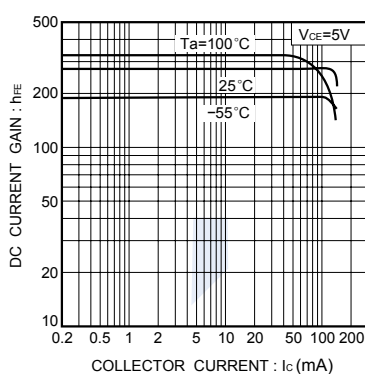


Fig.5 DC current gain vs. collector current (I)I

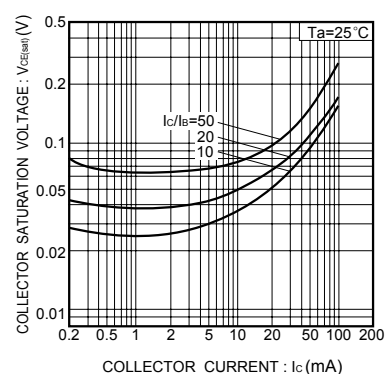


Fig.6 Collector-emitter saturation voltage vs. collector current

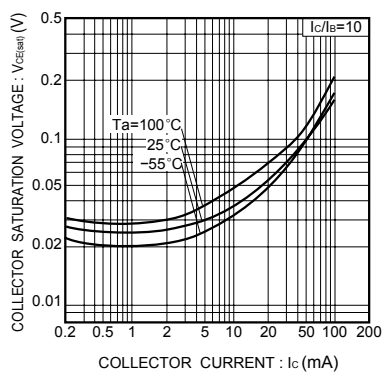


Fig.7 Collector-emitter saturation voltage vs. collector current (I)

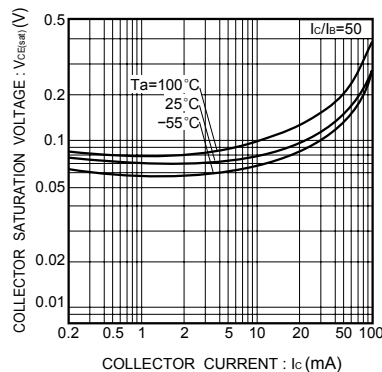


Fig.8 Collector-emitter saturation voltage vs. collector current (I)I

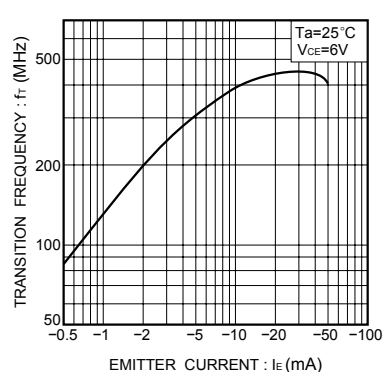


Fig.9 Gain bandwidth product vs. emitter current

■ Typical Characteristics

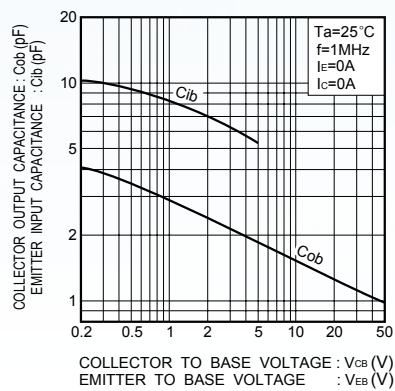


Fig.10 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage


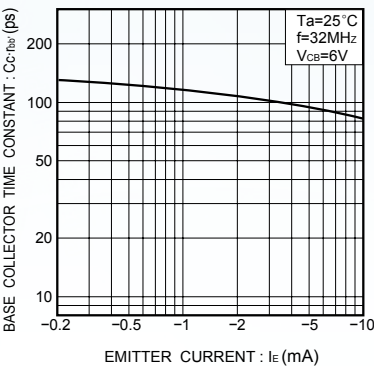


Fig.11 Base-collector time constant vs. emitter current

■ SOT-323

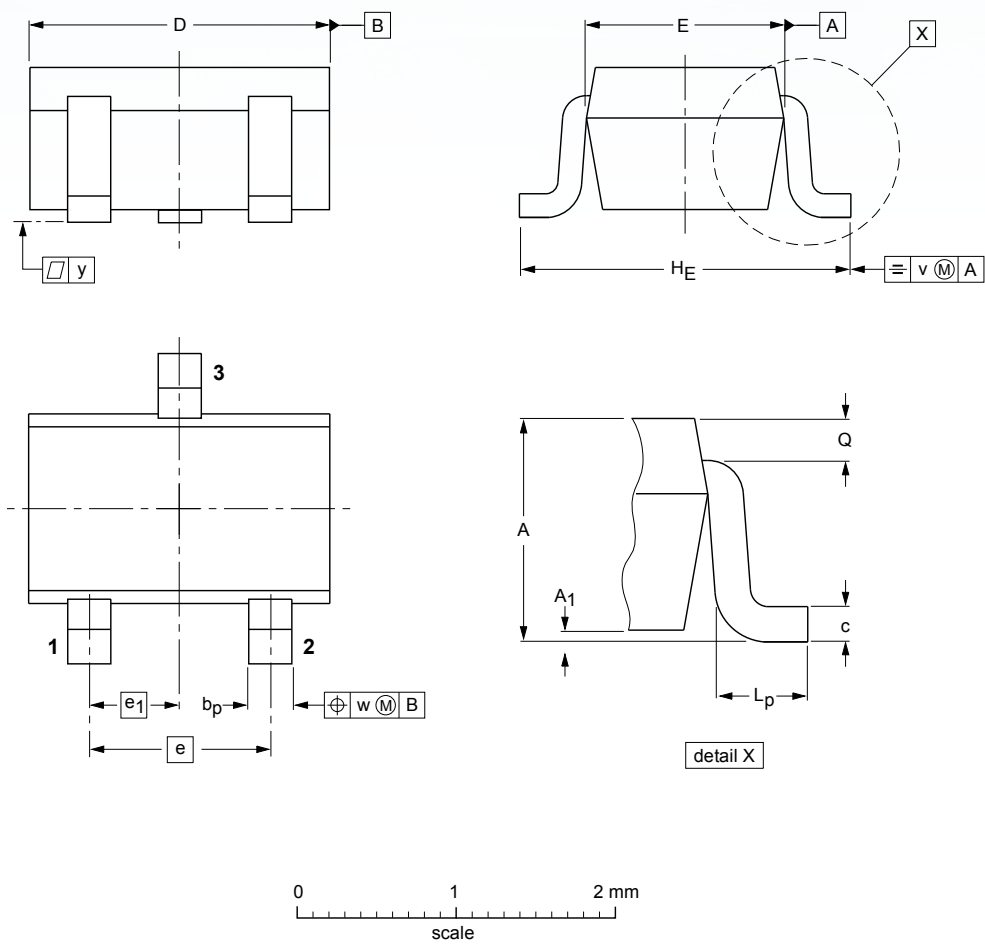

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max	b _p	c	D	E	e	e ₁	H _E	L _p	Q	v	w
mm	1.1 0.8	0.1	0.4 0.3	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.23 0.13	0.2	0.2

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.