

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	EVBAV23X-S1
▶ Overseas	Part Number	BAV23X
▶ Equivalent	Part Number	BAV23X


"S1" means SOT-23

EV is the abbreviation of name EVVO




■ Switching Diodes

■ Features

- Fast Switching Speed
- For General Purpose Switching Applications.
- High Conductance



■ Simplified outline(SOT-23)



■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _{RRM}	250	V
Working Peak Reverse Voltage	V _{RWM}	200	
DC Blocking Voltage	V _R	200	
RMS Reverse Voltage	V _{R(RMS)}	141	
Forward Continuous Current	I _{FM}	400	mA
Non-Repetitive Peak Forward Surge Current	I _{FSM}	t=1us 9	A
		t=100us 3	
		t=10ms 1.7	
Repetitive Peak Forward Surge Current	I _{FRM}	625	mA
Power Dissipation	P _d	350	mW
Thermal Resistance Junction to Ambient	R _{θJA}	357	°C/W
Junction Temperature	T _J	150	°C
Storage Temperature range	T _{stg}	-65 to 150	

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	V _R	I _R = 100 uA	250			V
Forward voltage	V _F	I _F = 100 mA			1	
		I _F = 200 mA			1.25	
Reverse voltage leakage current	I _R	V _R = 200 V , T _J = 25°C			100	nA
		V _R = 200 V , T _J = 150°C			100	uA
Junction capacitance	C _j	V _R = 0 V, f= 1 MHz			5	pF
Reverse recovery time	t _{rr}	I _F =I _R =30mA, I _{rr} =0.1xI _R , R _L =100Ω			50	ns

■ Marking

NO.	EVBAV23A-S1	EVBAV23C-S1	EVBAV23S-S1
Marking	KT7	KT6	KL31

■ Typical Characteristics

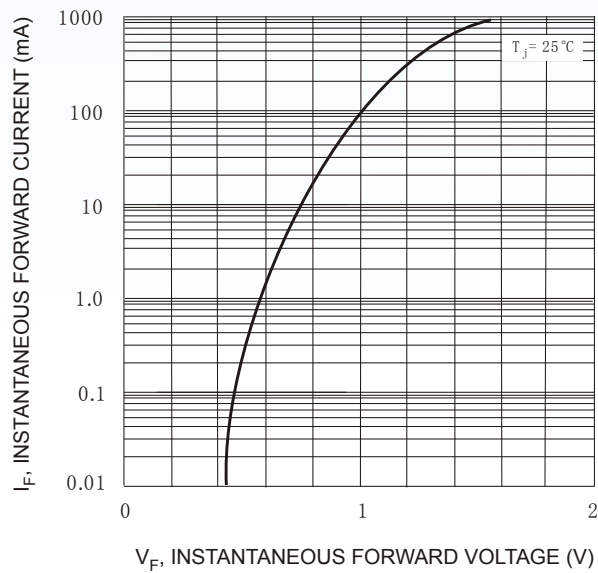


Fig. 1 Forward Characteristics


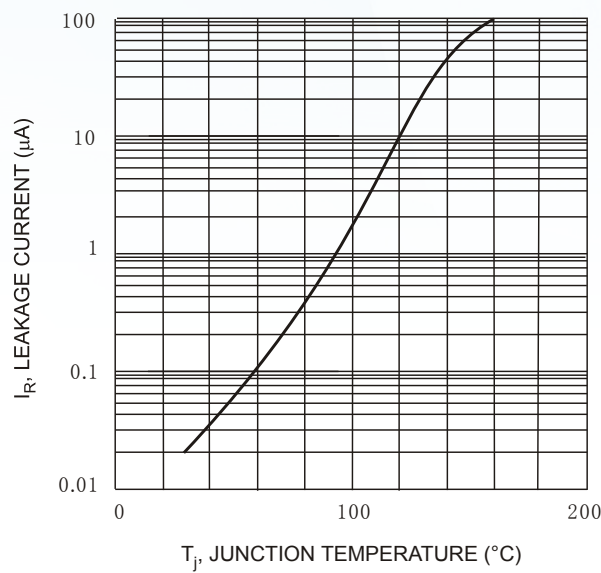


Fig. 2 Leakage Current vs Junction Temperature

■ SOT-23

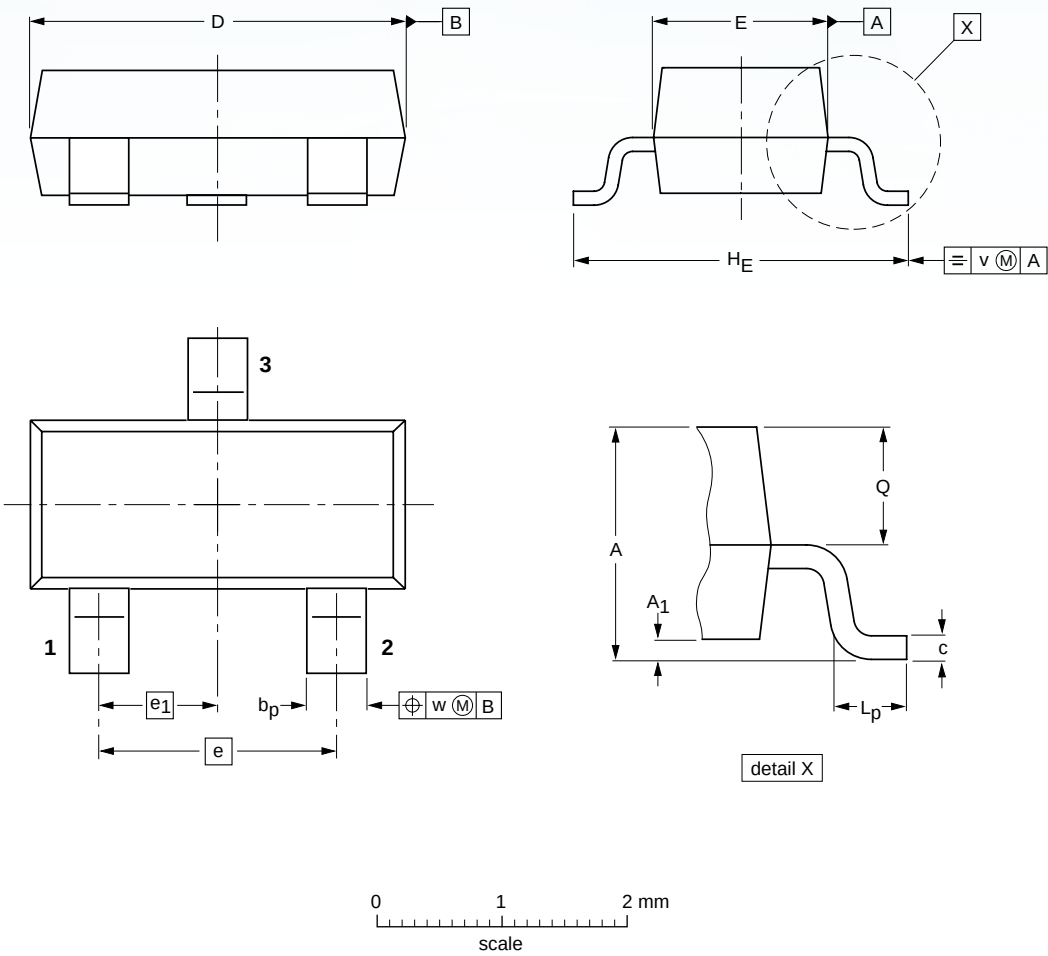

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max.	b _p	c	D	E	e	e ₁	H _E	L _p	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.