

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification


▶ Domestic	Part Number	BAS521
▶ Overseas	Part Number	BAS521
▶ Equivalent	Part Number	BAS521

EV is the abbreviation of name EVVO


■ High Voltage Switching Diode

FEATURES

- Ultra small plastic SMD package
- High continuous reverse voltage: 300V
- Repetitive peak forward current: 250 mA
- High switching speed: max. 50ns



■ Simplified outline(SOD-523)



APPLICATIONS

- High speed switching.
- High voltage switching.

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Parameter	Symbol	Limits	Unit
Repetitive peak reverse voltage	V_{RRM}	300	V
Continuous reverse voltage	V_R	300	V
Continuous forward current $T_s \leq 90^{\circ}C$; Note 1	I_F	250	mA
Repetitive forward current $t_p=1ms$	I_{FRM}	1	A
Non-repetitive peak forward surge current $t_p=1ms$; square wave; $T_j=25^{\circ}C$ prior to surge	I_{FSM}	4.5	A
Total power dissipation $T_s \leq 90^{\circ}C$; Note 1	P_{tot}	500	mW
Junction temperature	T_j	150	$^{\circ}C$
Storage And operating ambient temperature	T_{stg}, T_{amb}	-65 to +150	$^{\circ}C$

Note


1. T_s is the temperature at the soldering point of the cathode tab.

■ Marking

Marking	L4
---------	----


ELECTRICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
breakdown voltage	V_{BR}	$I_R=100\mu\text{A}$	300	340		V
Forward voltage	V_F	$I_F=100\text{mA}$		0.95	1.1	V
Reverse current	I_R	$V_R=250\text{V}$		30	150	nA
		$V_R=250\text{V}, T_J=150^\circ\text{C}$		40	100	μA
Diode capacitance	C_d	$V_R=0, f=1\text{MHz}$		0.4	5	pF
Reverse recovery time	t_{rr}	when switched from $I_F=30\text{mA}$ to $I_R=30\text{mA}$; $R_L=100\Omega$; measured at $I_R=3\text{mA}$		16	50	ns

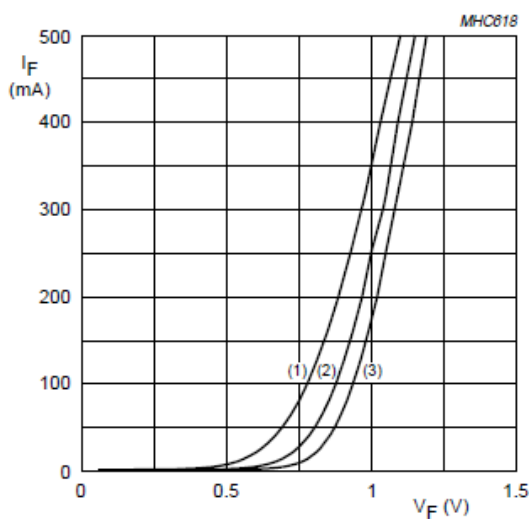TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified


- (1) $T_{amb} = 150^\circ\text{C}$.
 (2) $T_{amb} = 75^\circ\text{C}$.
 (3) $T_{amb} = 25^\circ\text{C}$.

Fig 1 Forward current as a function of forward voltage; typical values.

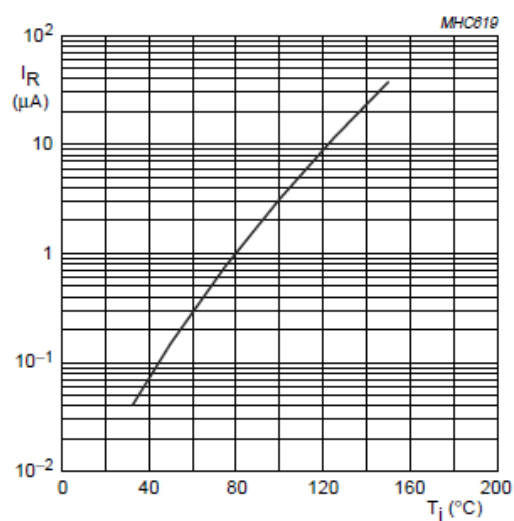

$V_R = V_{Rmax}$; typical values.

Fig 2 Reverse current as a function of junction temperature.

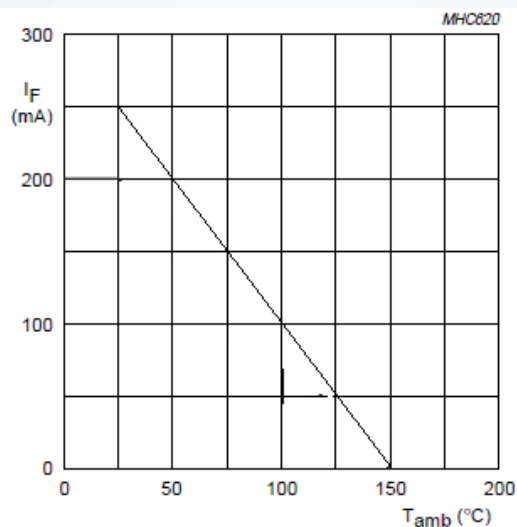


Fig 3 Maximum permissible continuous forward current as a function of ambient temperature.


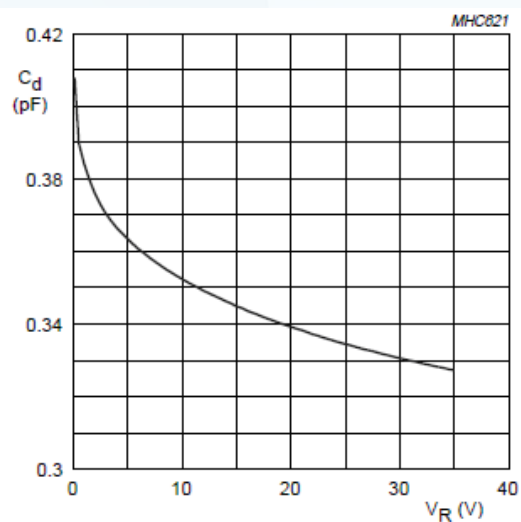


Fig 4 Diode capacitance as a function of reverse voltage; typical values.

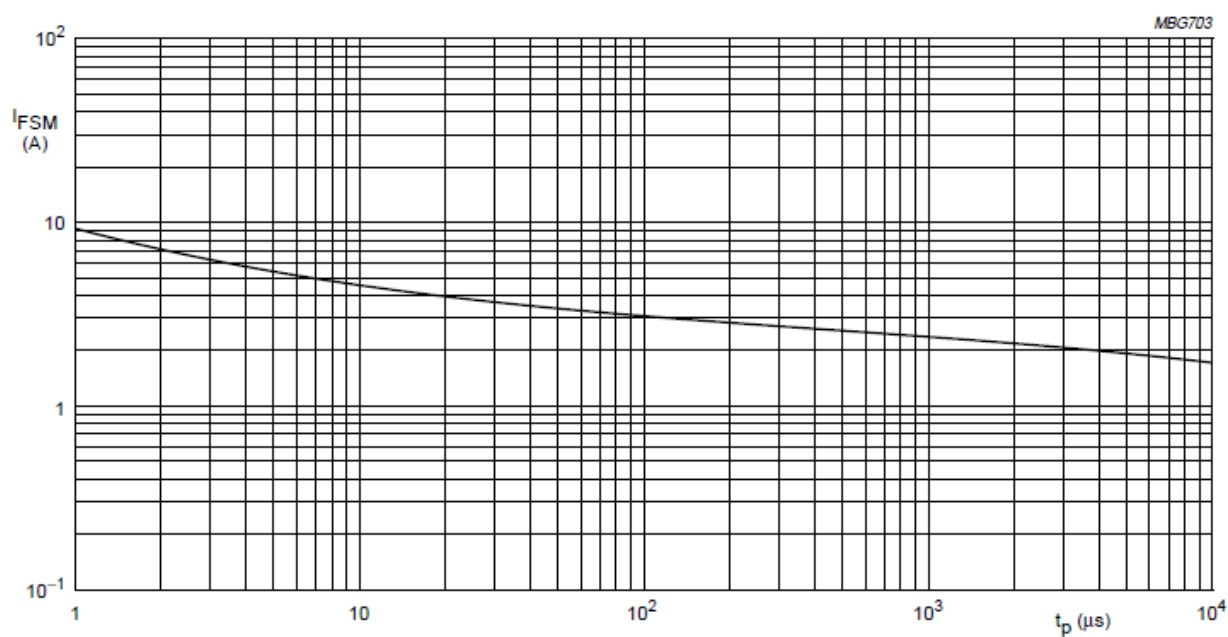


Based on square wave currents.
 $T_j = 25^\circ\text{C}$ prior to surge.

Fig 5 Maximum permissible non-repetitive peak forward current as a function of pulse duration.


PACKAGE OUTLINE

Plastic surface mounted package

SOD-523

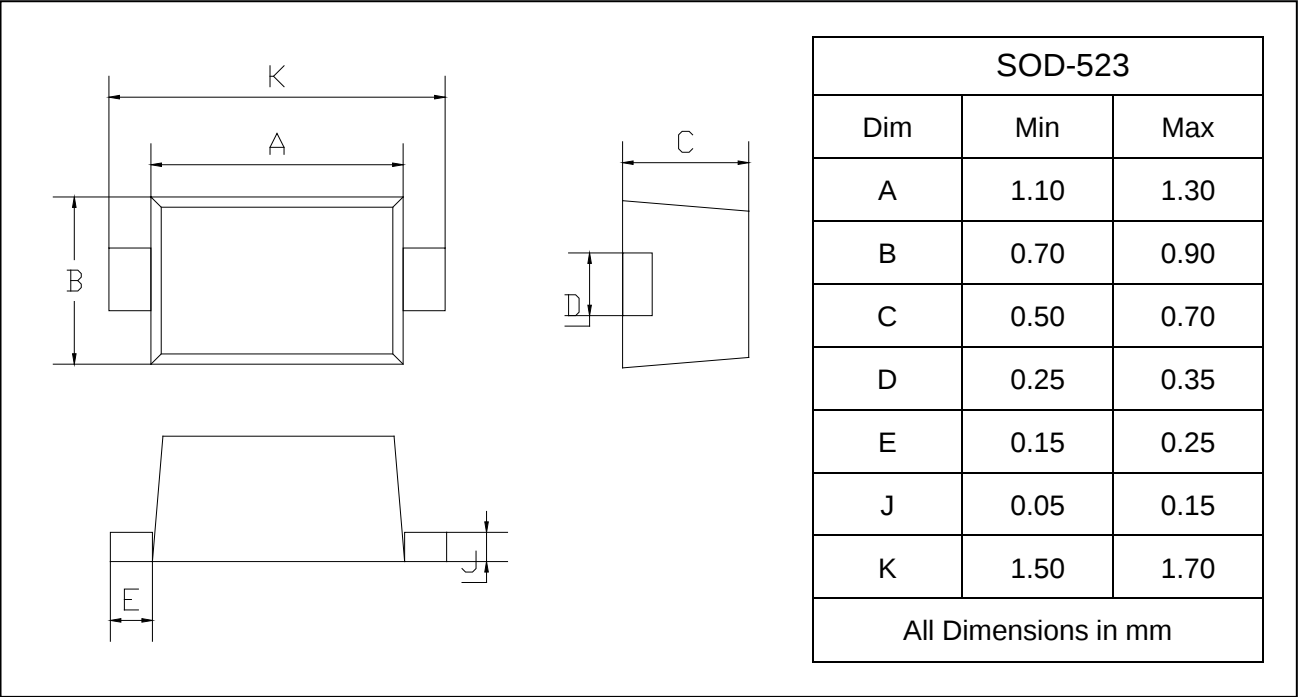

SOLDERING FOOTPRINT

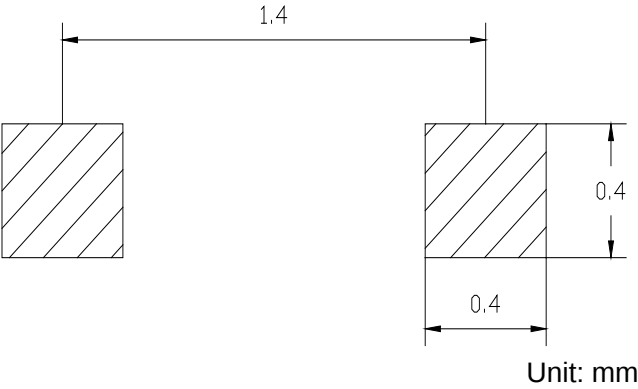

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.