

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	BCV49
▶ Overseas	Part Number	BCV49
▶ Equivalent	Part Number	BCV49


EV is the abbreviation of name EVVO

NPN Darlington Transistor


Features

- High Collector Current
- High Current Gain
- RoHS and Reach Compliant
- Halogen and Antimony Free
- Moisture Sensitivity Level 1

Equivalent Circuit




SOT-89



1.Base 2.Collector 3.Emitter

Marking Code



Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.







Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	80	V
Collector Emitter Voltage	V_{CEO}	60	V
Emitter Base Voltage	V_{EBO}	10	V
Collector Current	I_C	0.5	A
Maximum Power Dissipation	P_D	1.1	W
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 5\text{ V}$, $I_C = 1\text{ mA}$ at $V_{CE} = 5\text{ V}$, $I_C = 10\text{ mA}$ at $V_{CE} = 5\text{ V}$, $I_C = 100\text{ mA}$	H_{FE}	2000 4000 10000	-- -- --	-- -- --	--
Collector Base Cutoff Current at $V_{CB} = 60\text{ V}$	I_{CBO}	--	--	100	nA
Emitter Base Cutoff Current at $V_{EB} = 10\text{ V}$	I_{EBO}	--	--	100	nA
Collector Base Breakdown Voltage at $I_C = 100\text{ }\mu\text{A}$	$V_{(BR)CBO}$	80	--	--	V
Collector Emitter Breakdown Voltage at $I_C = 10\text{ mA}$	$V_{(BR)CEO}$	60	--	--	V
Emitter Base Breakdown Voltage at $I_E = 10\text{ }\mu\text{A}$	$V_{(BR)EBO}$	10	--	--	V
Collector Emitter Saturation Voltage at $I_C = 100\text{ mA}$, $I_B = 0.1\text{ mA}$	$V_{CE(sat)}$	--	--	1	V
Base Emitter Saturation Voltage at $I_C = 100\text{ mA}$, $I_B = 0.1\text{ mA}$	$V_{BE(sat)}$	--	--	1.5	V
Base Emitter On Voltage at $V_{CE} = 5\text{ V}$, $I_C = 10\text{ mA}$	$V_{BE(on)}$	--	--	1.4	V
Transition Frequency at $V_{CE} = 5\text{ V}$, $I_C = 30\text{ mA}$, $f = 100\text{ MHz}$	f_T	--	220	--	MHz


Typical Characteristic Curves

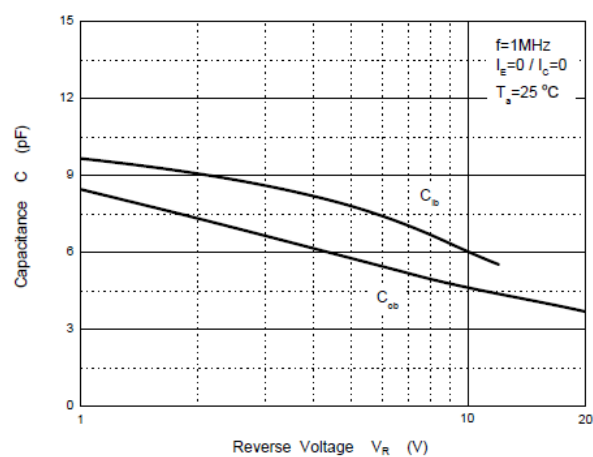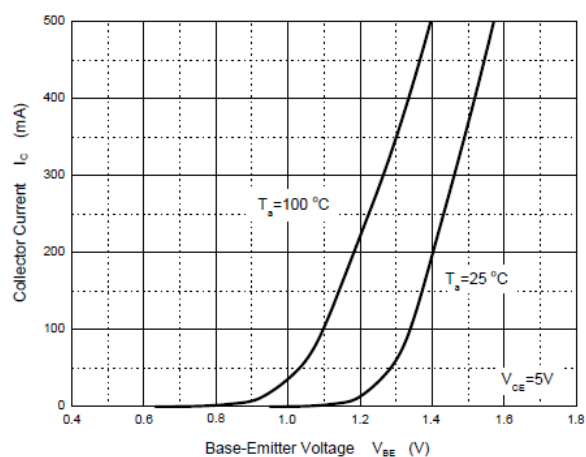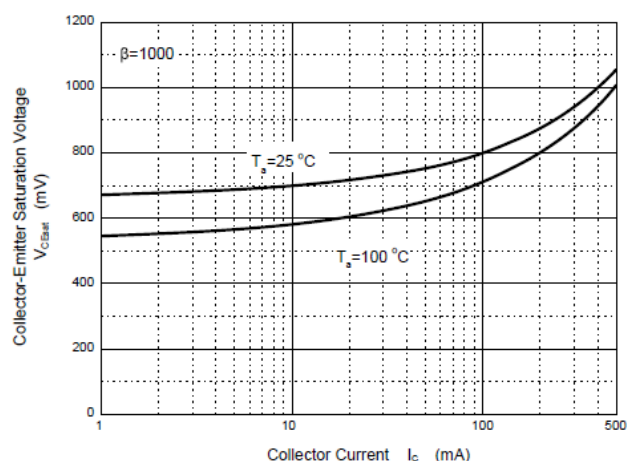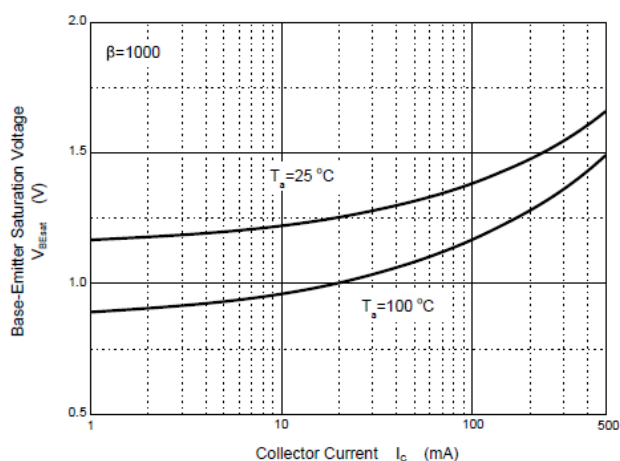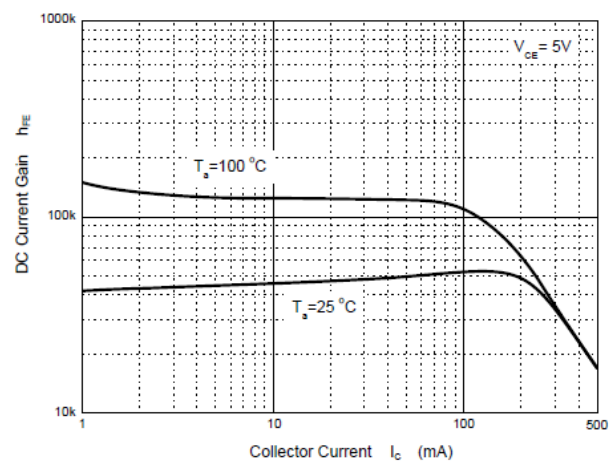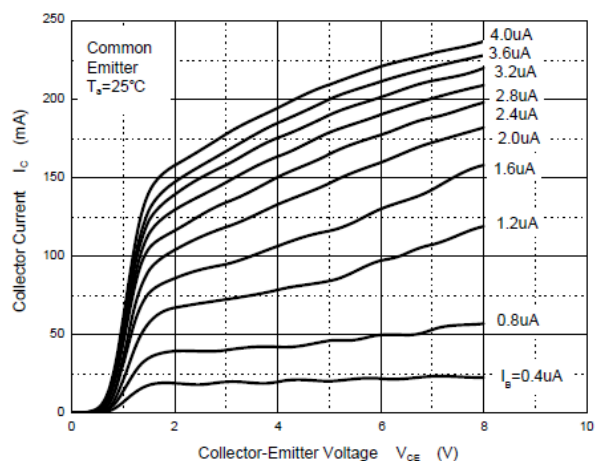

Package Outline

SOT-89


Dimensions in mm

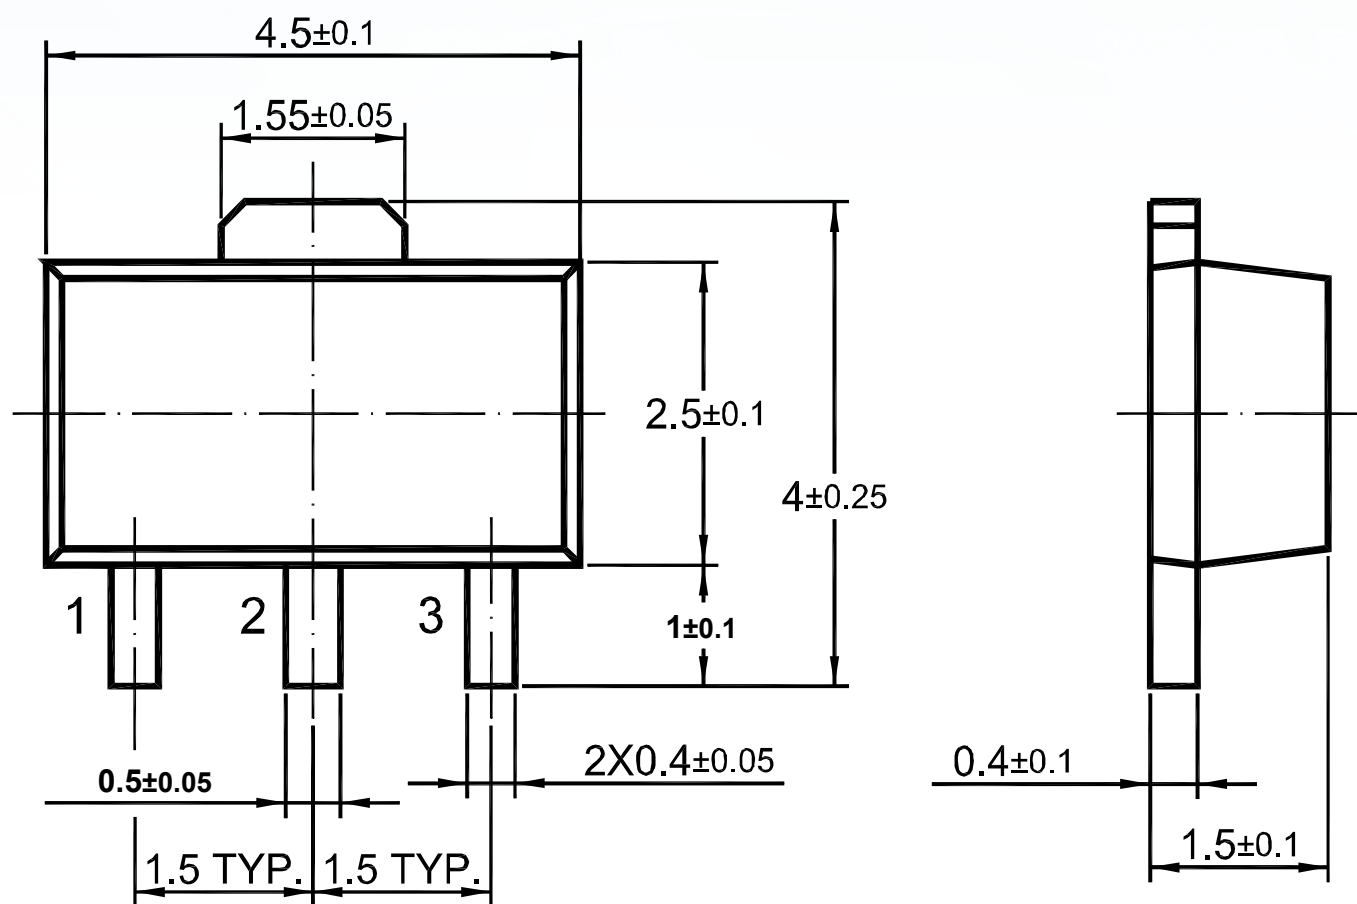**Ordering Information**

Device	Package	Shipping
BCV49	SOT-89	1,000PCS/Reel&7inches
		3,000PCS/Reel&13inches

Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

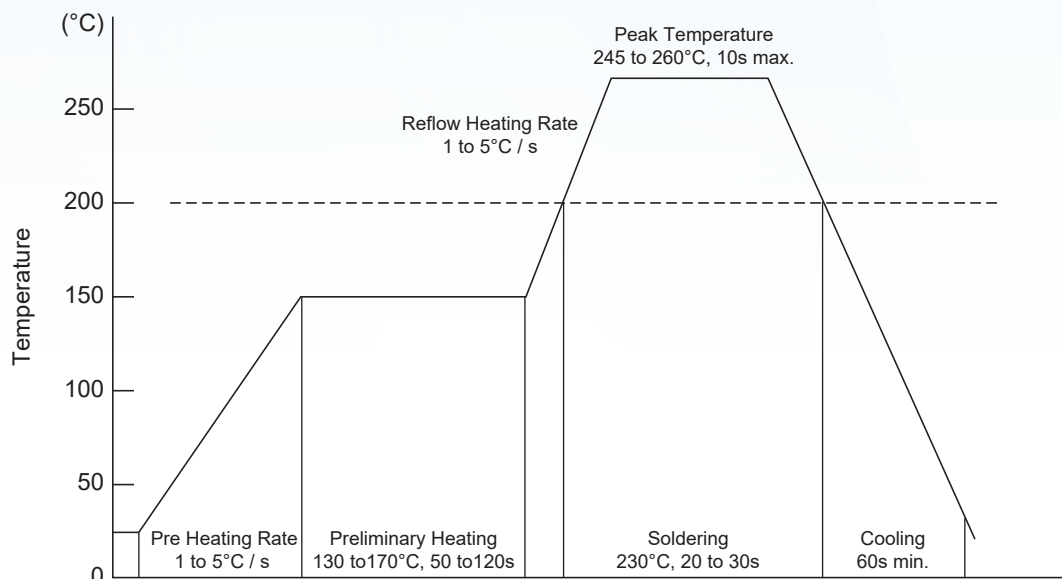

Recommended peak temperature is over 245°C. If peak temperature is below 245°C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering


- Temperature: 300°C
- Time: 3s max.
- Times: one time

◆ Storage conditions


- **Temperature**
5 to 40°C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing

Package Specifications


- The method of packaging (1,000PCS/Reel&7inches)

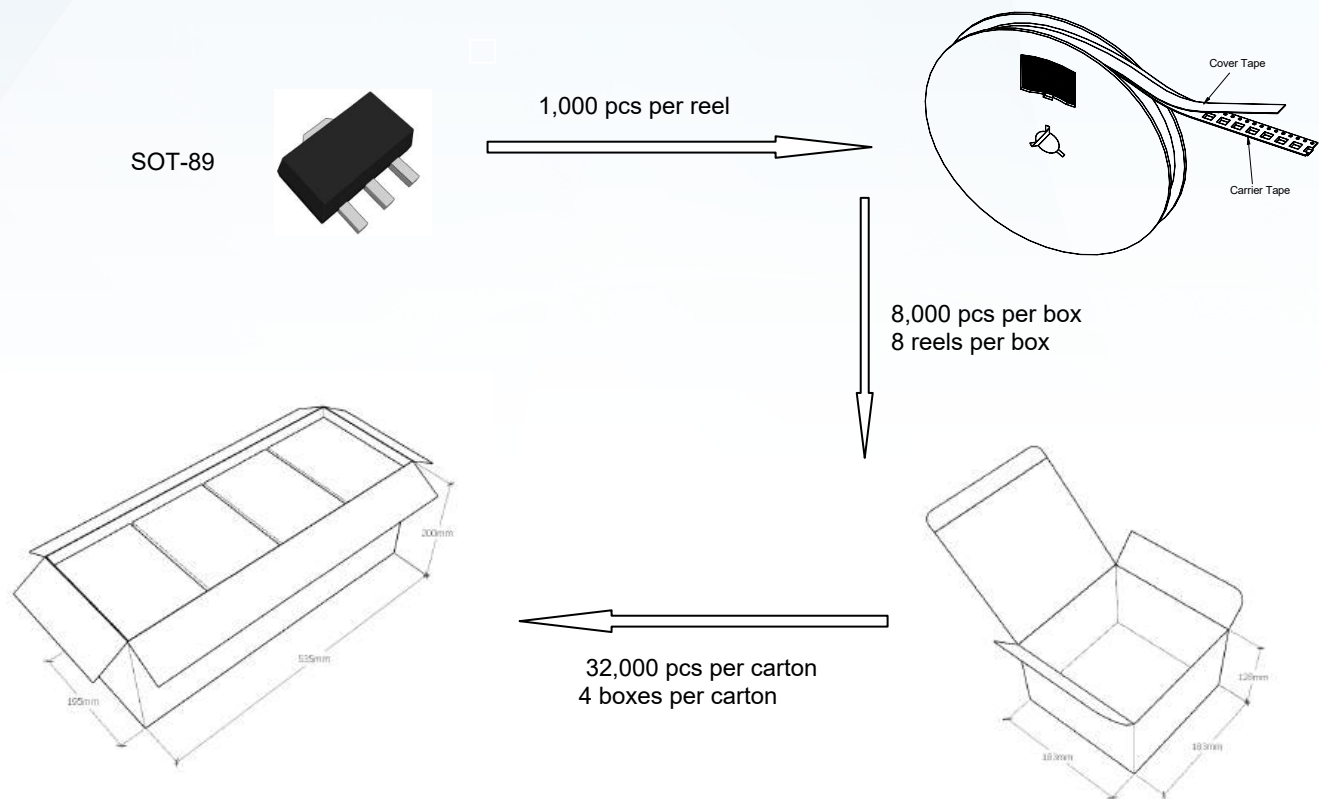

◆ Embossed tape and reel data

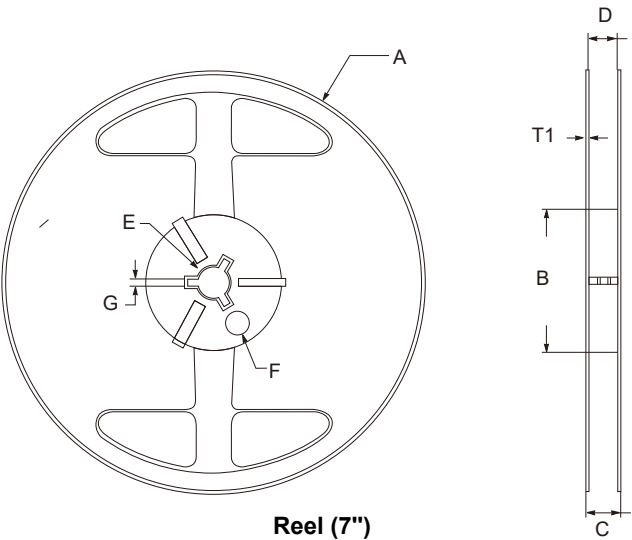


symbol	Value(unit:mm)
A	Φ179±1
B	60.5±0.2
C	15.3±0.3
D	12.5~13.7
E	Φ13.5±0.2
F	Φ10.0±0.2
G	2.7±0.2
T1	1.0±0.2


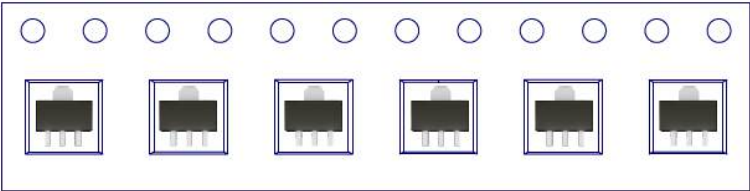


Package Specifications

- The method of packaging (3,000PCS/Reel&13inches)

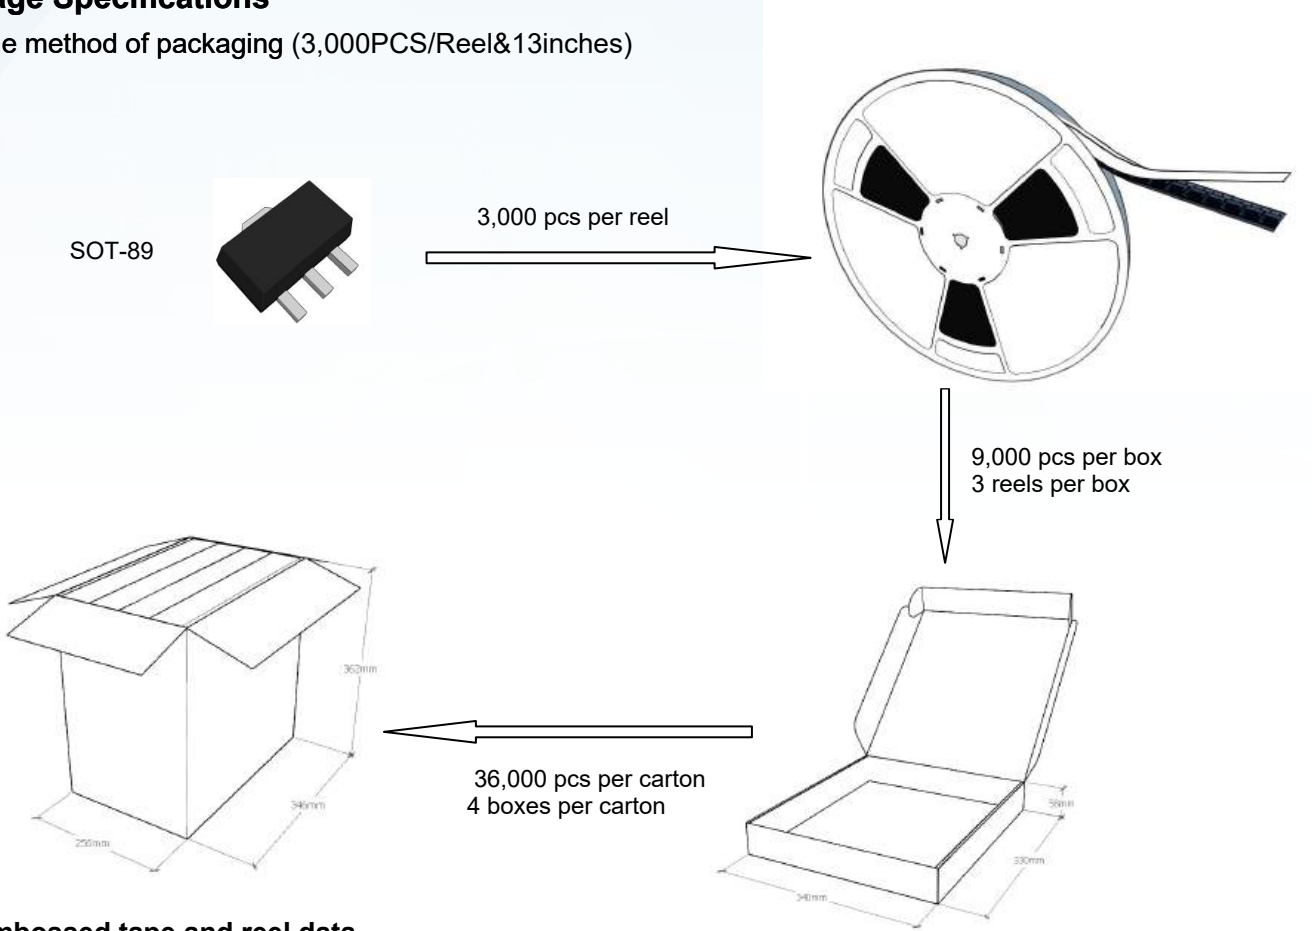

◆ Embossed tape and reel data

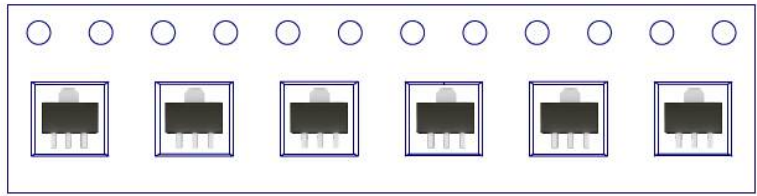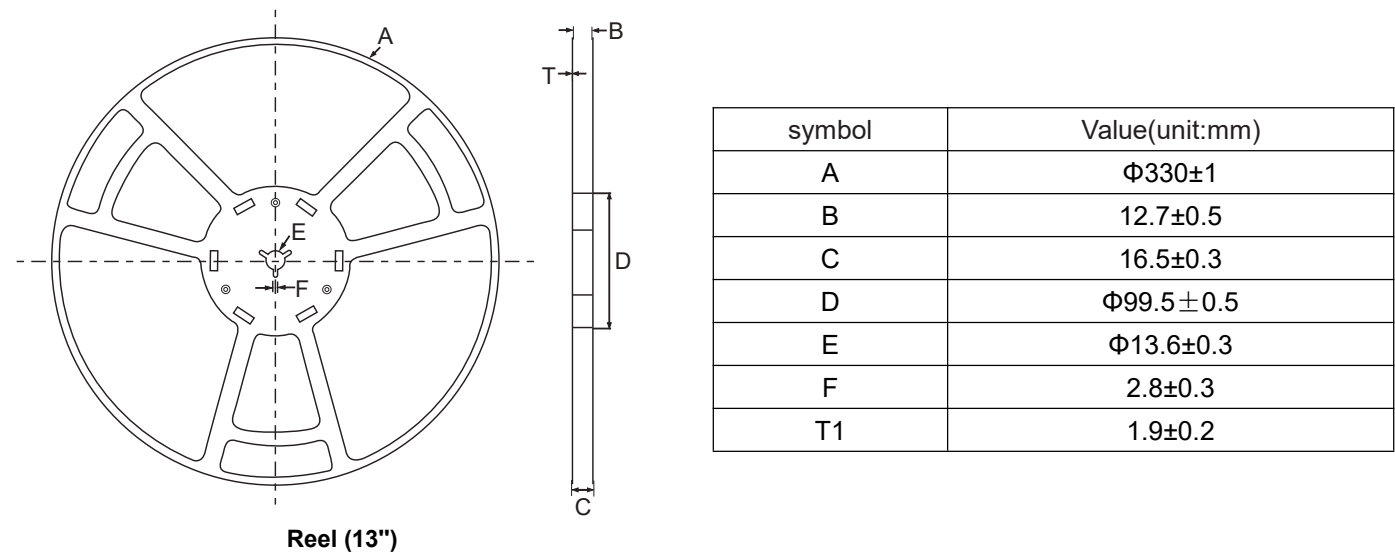

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.